

Concord

OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM 2023757



Features

- OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM is a high efficacy low glare luminaire for office and education applications. Direct / Indirect lighting with 80% downlight and 20% uplight ratio for ceiling suspended mounting. Size: 1129x200x45mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. DALI DT8 control for colour tuning. 3hr maintained emergency version. Tunable White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3700lm. Power consumption 34W. Luminaire efficacy 109lm/W. Lifespan: 60,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

Product Overview


Product name	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	109
Light colour	Tunable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	34

Concord

OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM 2023757

Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237579
Warranty	5 years


Photometry

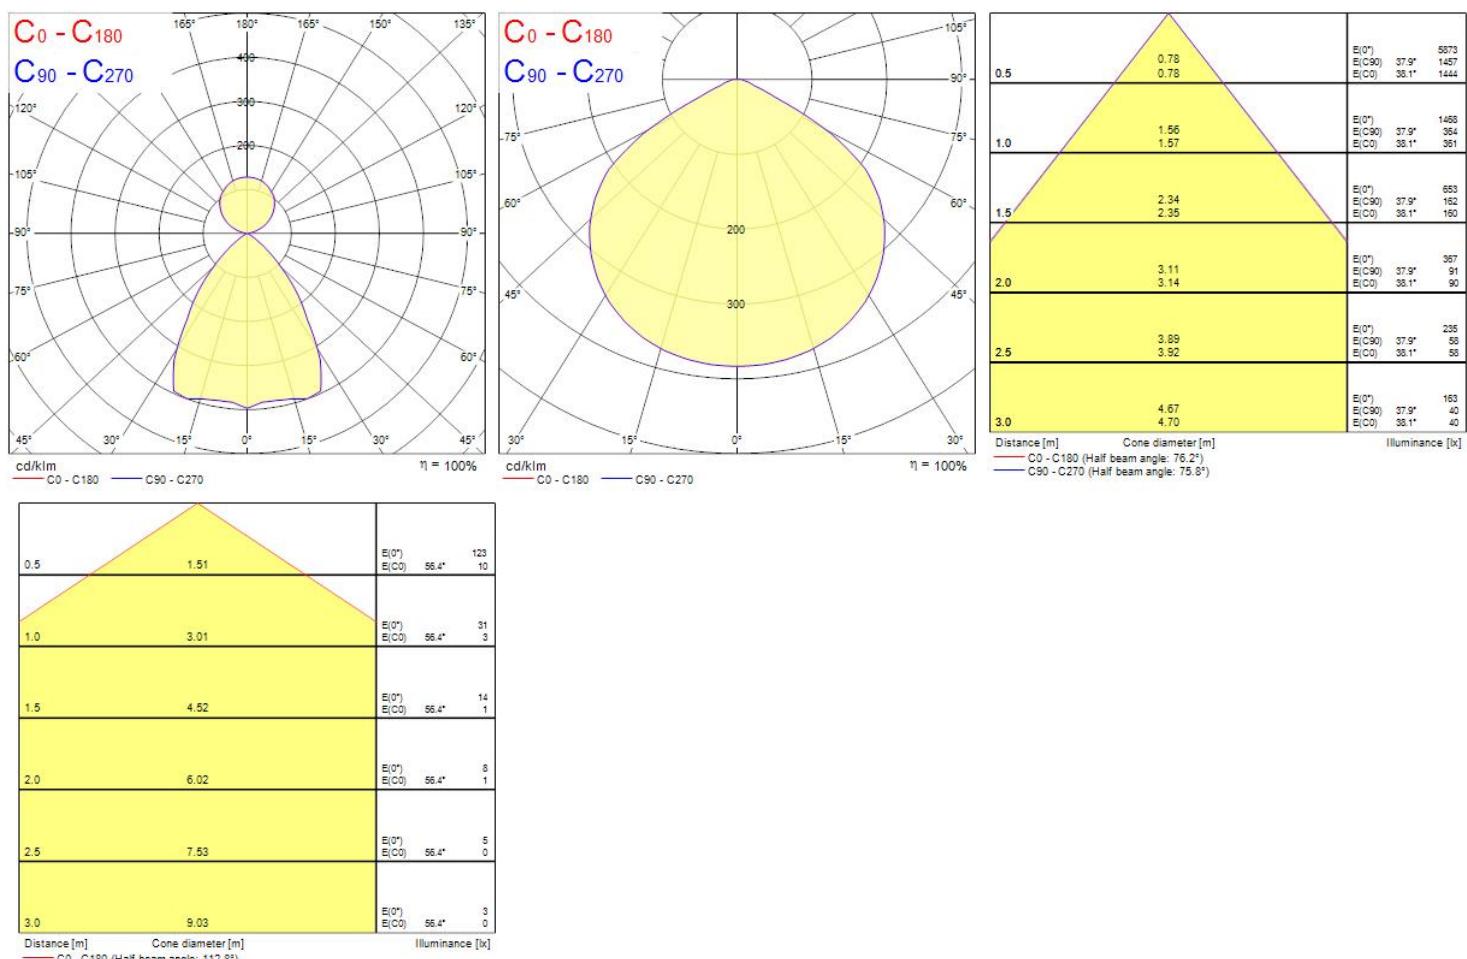

Concord

OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM 2023757

Technical drawings

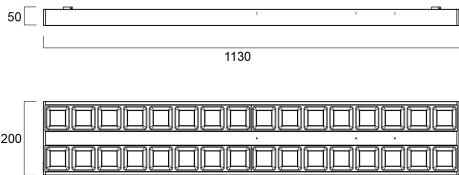

Data table

GENERAL DATA

Product name	OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Performance ambient temperature T_q (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	109
Correlated colour temperature range (K)	3000 - 6000
Light colour	Tunable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

Concord

OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM 2023757

Emergency duration (h)	3
------------------------	---

ELECTRICAL DATA

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	200
Inrush Current (A)	23
Inrush Duration (μs)	290
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	13
Connectable conductor cross section - Min (mm ²)	2.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1129

Concord

OPTIX SURFACE 1200x200 2 LINE D/I TW ALU DALI EM 2023757

Nominal Product Width (mm)	200
Weight (kg)	4.8

PACKAGING

Single packaging type	Carton
Product EAN number	5025768237579
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768237579
Packaging outer length / height (cm)	117.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No