

Product data sheet Spirotech

Product name

SpiroPure Pro 9.5 GLT

Article number

G76.357


Product properties

The SpiroPure Pro GLT comes with a conductivity controller, -probe and motorised 2 port valve for a more accurate measurement and control of the conductivity in the system water compared to the LED monitor.

Product image



Product dimensions

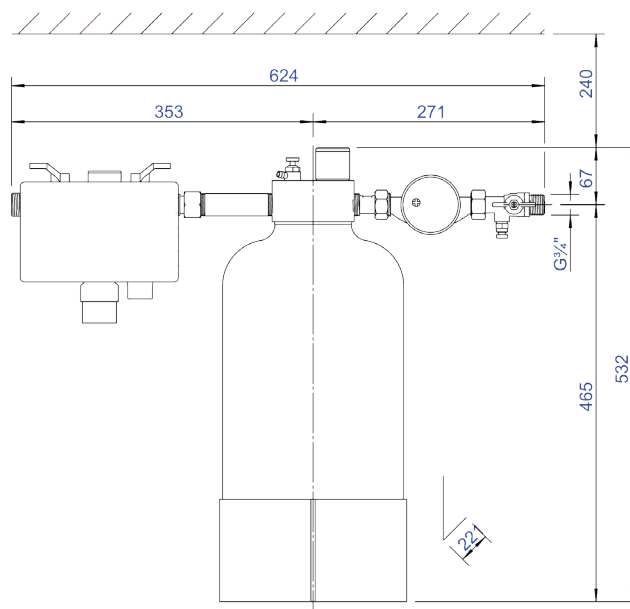

Product data sheet Spirotech

ETIM product data

Height	532 mm	Suitable for fixed installation	Yes
Max. operating pressure	8 bar	Suitable for mobile use	No
With insulation	No	Nominal diameter	3/4 inch (20)
With drain funnel	No	With filter	No
With pressure reducer	No	With de-aerator	No
Size of cartridge	9.5 l	With automatic filling function	No
Suitable for softening	Yes	Filling capacity	600 l/h
Max. temperature at the inlet	40 °C	Width	624 mm
Max. temperature at the outlet	40 °C	Depth	221 mm
Suitable for full demineralization	Yes	Pressure	2 - 8 bar
Connections	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)	Suitable for membrane pressure expansion tank	Yes
Suitable for pH value stabilization	Yes	Suitable for compressor-controlled automatic expansion unit	No
With pressure gauge	No		

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

