

Concord

NILO 1200 DIR/INDIR 4K DALI EM BLACK 2050615



Features

- Nilo is a 360° curve-shaped luminaire with a striking, minimalistic design, perfect for retail, hospitality, and office environments. The product can be suspended at different heights to create appealing lighting effects. Stand-alone and self-contained lighting fixture. Aluminium body, opal diffuser, emits direct and indirect lighting. Textured black finishing colour. Light color temperature: 4000K, neutral white. System power: 88W. Fixture lumen output: 9570lm, efficacy: 109lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation. DALI dimmable, 3-hours self-contained EMPRO self-test emergency, 220-240V / 50-60Hz 75% direct, and 25% indirect lighting. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: diameter 1140mmx65mm. 3h emergency in function: direct lighting only, partial lighting (only direct and 1/4 of whole luminaire is light up in emergency mode), 200lm.

Product Overview


Product name	NILO 1200 DIR/INDIR 4K DALI EM BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC002892
Fixture luminous flux (lm)	9570
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000

Concord

NILO 1200 DIR/INDIR 4K DALI EM BLACK 2050615

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	88
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5025768506156
Warranty	5 years
Dimming method	DALI

Photometry

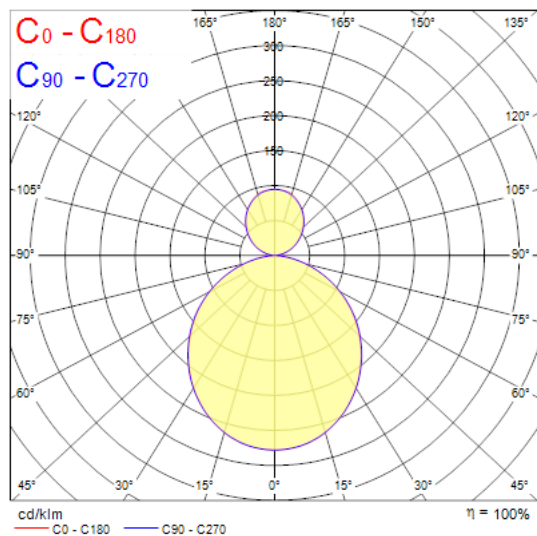

Technical drawings

