


Concord

Solstice 150 IP65 1700lm 930 DALI
2070171

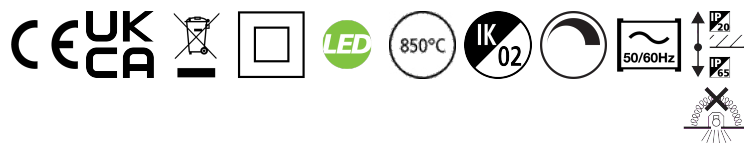

Features

- The Solstice 150 IP65 1700lm 930 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IP20, Cut out dimensions: 150mm.

Product Overview


| | |
|---------------------------------|-----------------------------------|
| Product name | Solstice 150 IP65 1700lm 930 DALI |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1700 |
| Luminous flux (lm) | 1700 |
| Luminaire efficacy (lm/W) | 113 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 70 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |

Concord

Solstice 150 IP65 1700lm 930 DALI 2070171

| | |
|-----------------------------|--|
| Total power consumption (W) | 15 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP65/20 |
| IK rating | IK02 |
| Product EAN number | 5025768701711 |
| Warranty | 5 years |
| Useful luminous flux (#use) | 1700 |
| Dimming method | DALI, DALI-2, Switch-dim (mains-rated) |

Photometry

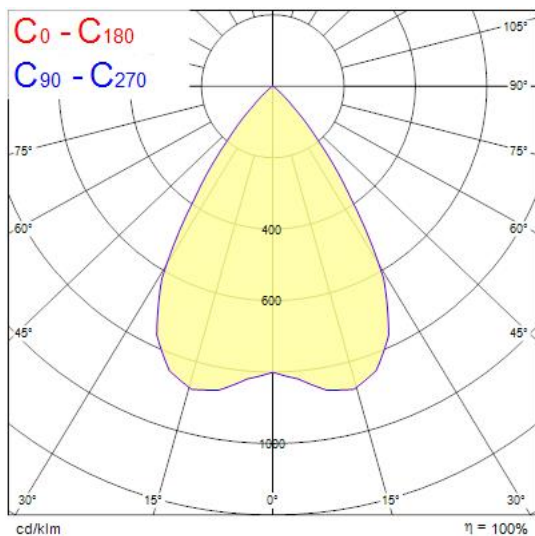

Technical drawings

