

Features

- LiFeSafe PRO EXIT IP65 EX W NM/MT DA is a DALI addressable LED surface bulkhead. Maintained or Non-Maintained, 3Hr emergency duration. 4 ISO7010 Exit legends, Left, Right, Up and Down as an accessory. Maximum viewing distance 21m. 0 to +25°C operating temperature range. 120lm output (No legend kit fitted), IKXX, IP65, Class II electrical construction, 6-year warranty.


Product Overview

Product name	LIFESAFE PRO EXIT IP65 EX W NM/MT DA
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Light source included	0038830
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC001957
Fixture luminous flux (lm)	120
Luminaire efficacy (lm/W)	37.5
Correlated colour temperature (k)	5700
CRI (Ra)	70
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	120
Luminous flux (emergency) (lm)	120
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White

LIFESAFE PRO EXIT IP65 EX W NM/MT DA
0038830

IP rating	IP65
IK rating	IK03
Product EAN number	5410288388304
Warranty	6 years

Technical drawings

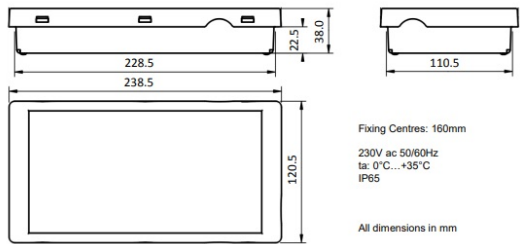

Fixing Centres: 160mm
230V ac 50/60Hz
ta: 0°C...+35°C
IP65

All dimensions in mm