


Concord

Solstice 200 IP65 2200lm 940 DALI
2070174

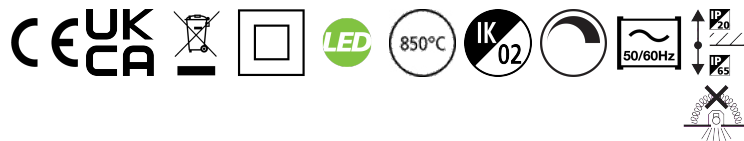

Features

- The Solstice 200 IP65 2200lm 940 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP65/IP20, Cut out dimensions: 200mm.

Product Overview


Product name	Solstice 200 IP65 2200lm 940 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2200
Luminous flux (lm)	2200
Luminaire efficacy (lm/W)	129
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1

Concord

Solstice 200 IP65 2200lm 940 DALI 2070174

Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768701742
Warranty	5 years
Useful luminous flux (#use)	2200
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)

Photometry

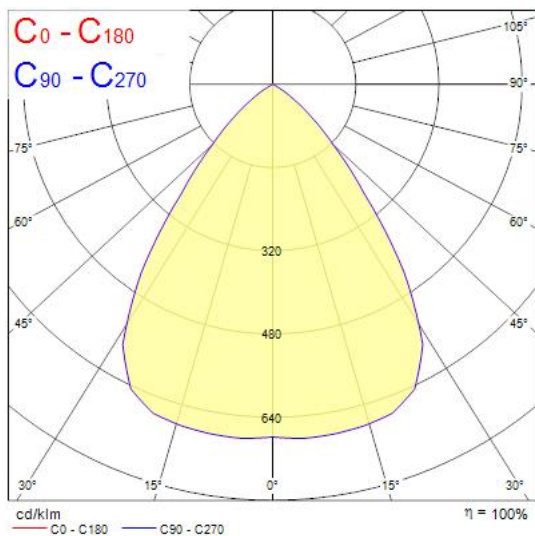

Technical drawings

