

Product data

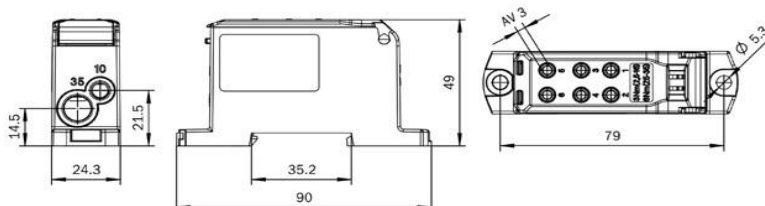
Product code	VG03-0053	STK-code	1914358	EAN-code	6430051860324
Product name	OJL connector 135 Blue			ETIM class	EC000276
Wires	IN 1x(Al/Cu) 2,5-35 mm ² / 1x (Al/Cu) 2,5-10 mm ² OUT: 4x (Cu) 2,5-16mm ² / 2x (Cu) 2,5-10 mm ²				

Technical data

Nominal current (IEC)	Cu	135	A
	Al	120	A
Nominal voltage (IEC)		1000	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		35	mm ²
Tightening torque			
	2,5-16 mm ² (M6)	3	Nm
	25-35 mm ² (M8)	6	Nm
		-	
		-	
Input	1x Al/Cu 2,5-35 mm ² , 1x Al/Cu 2,5-10 mm ²		
Output	4x Cu 2,5-16 mm ² , 2x Cu 2,5-10 mm ²		
		-	
Operating temperature		80	°C
Weight		78	g
IP-protection		IP20	
Standards	EN IEC 61238-1:2019; EN 60947-7-1:2009;EN 60947-7-2:2009		
Color / Material	Blue Cover PC, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium		
Mounting / Connection	Din rail and 2x screw (M5) mounting		


Description

The single pole distribution block for branching connection. Distribution block with 2 inputs and it will distribute the current through 6 output cables. Connector is made from tin plated aluminium and housing is PA66 V0.

Drawing

Package

Package	Box	Pcs / Package	36	Weight [kg]	2,90
Length [mm]	285	Width [mm]	180	Height [mm]	115

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi