



## Harmony XB5, Kop Ø30mm voor noodstop, Sleutelontgrendeling, Ø22mm, Rood

ZB5AS934

EAN Code: 3389110906943

Prijs: 43,05 EUR

### Hoofd

|                                    |                                               |
|------------------------------------|-----------------------------------------------|
| range of product                   | Harmony XB5                                   |
| product or component type          | Kop voor drukknop voor noodstop               |
| bestemming product                 | Drukknop noodstop                             |
| device short name                  | ZB5                                           |
| kraag materiaal                    | Donkergrijs kunststof                         |
| koptype                            | Standaard                                     |
| bevestigingsdiameter               | 22 mm                                         |
| verkoop per ondeelbare hoeveelheid | 1                                             |
| vorm van kop signaleringseenheid   | Rond                                          |
| type operator                      | activeringsactie en mechanische vergrendeling |
| reset                              | Sleutelontgrendeling                          |
| operator profiel                   | Rood paddenstoel Ø 30 mm, niet gemarkeerd     |
| type slot met sleutel              | Sleutel 455                                   |
| terugtrekpositie sleutel           | Midden                                        |
| product presentatie                | Basisonderdeel                                |

### Complementair

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD totale breedte             | 30 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| CAD totale hoogte              | 30 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| CAD totale diepte              | 79 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| net weight                     | 0,068 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| mechanical durability          | 300000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| naam station                   | XALD 1...5 uitsnijdingen<br>XALK 1...5 uitsnijdingen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| elektrische samenstellingscode | C7 voor <4 contacten met enkelvoudig blokken in vooraan gemonteerd<br>C8 voor <4 contacten met enkelvoudig en dubbel blokken in vooraan gemonteerd<br>C11 voor <3 contacten met enkelvoudig blokken in vooraan gemonteerd<br>C15 voor <1 contacten met enkelvoudig blokken in vooraan gemonteerd<br>SF1 voor <3 contacten met enkelvoudig blokken in vooraan gemonteerd<br>SR1 voor <3 contacten met enkelvoudig blokken in montage aan achterzijde<br>C10 voor <4 contacten met enkelvoudig en dubbel blokken in vooraan gemonteerd |
| compatibility code             | ZB5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

### Omgeving

De weergegeven prijs is de adviesprijs in euro excl. BTW. Deze kan onderhevig zijn aan korting. Neem contact op met uw lokale distributeur of detailhandel voor de daadwerkelijke prijs

Disclaimer: Deze documentatie is niet bedoeld als vervanging voor en mag niet worden gebruikt voor het bepalen van de geschiktheid of betrouwbaarheid van deze producten voor specifieke gebruikerstoepassingen

|                                       |                                                                                                                                                                                         |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| beschermende behandeling              | TH                                                                                                                                                                                      |
| ambient air temperature for storage   | -40...70 °C                                                                                                                                                                             |
| ambient air temperature for operation | -40...70 °C                                                                                                                                                                             |
| overvoltage category                  | Klasse II conforming to IEC 60536                                                                                                                                                       |
| IP beschermingsgraad                  | IP66 conform aan IEC 60529<br>IP67<br>IP69<br>IP69K                                                                                                                                     |
| NEMA beschermingsgraad                | NEMA 13<br>NEMA 4X                                                                                                                                                                      |
| weerstand hoge druk drukring          | 7000000 Pa bij 55 °C, afstand: 0.1 m                                                                                                                                                    |
| IK-beschermingsgraad                  | IK03 conforming to IEC 50102                                                                                                                                                            |
| standards                             | ISO 13850<br>JIS C8201-5-1<br>UL 508<br>CSA C22.2 Nr 14<br>IEC 60947-1<br>IEC 60204-1<br>IEC 60947-5-4<br>IEC 60947-5-5<br>IEC 60947-5-1<br>IEC 60364-5-53<br>GB 14048.5<br>JIS C8201-1 |
| product certifications                | CSA<br>DNV<br>BV<br>LROS (Lloyds register of shipping)<br>UL listed                                                                                                                     |
| trilling bestendigheid                | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                                        |
| schokbestendigheid                    | 30 gn (duur = 18 ms) voor halve sinusgolf versnelling conform aan IEC 60068-2-27<br>50 gn (duur = 11 ms) voor halve sinusgolf versnelling conform aan IEC 60068-2-27                    |

## Verpakkingseenheid

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 5,400 cm  |
| Package 1 Width              | 4,400 cm  |
| Package 1 Length             | 8,800 cm  |
| Package 1 Weight             | 66,000 g  |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 100       |
| Package 2 Height             | 30,000 cm |
| Package 2 Width              | 30,000 cm |
| Package 2 Length             | 40,000 cm |
| Package 2 Weight             | 7,070 kg  |

## contractuele waarborg

|          |           |
|----------|-----------|
| Garantie | 18 months |
|----------|-----------|

Schneider Electric wil tegen 2050 de Net Zero-status hebben bereikt via partnerschappen in de toeleveringsketen, materialen met een lagere impact en circulariteit via onze doorlopende campagne "Use Better, Use Longer, Use Again" om de levensduur van producten en de recycleerbaarheid te verlengen.

[Uitleg van Environmental Data](#) >

[Hoe evalueren we de duurzaamheid van producten?](#) >

Milieuvoetafdruk

|                                            |   |
|--------------------------------------------|---|
| Totale levenscyclus ecologische voetafdruk | 1 |
|--------------------------------------------|---|

### Use Better

Materialen en verpakking

|                                   |                                                                          |
|-----------------------------------|--------------------------------------------------------------------------|
| Pakket met gerecycleerd karton    | Nee                                                                      |
| Verpakkingen zonder kunststof     | Nee                                                                      |
| <a href="#">EU-richtlijn RoHS</a> | Voldoet pro-actief (Product valt niet onder de EU RoHS juridische scope) |
| SCIP-nummer                       | F28cb399-1b6a-409d-ac7b-4169e47b25c8                                     |
| REACH-regelgeving                 | <a href="#">REACH-verklaring</a>                                         |

### Use Again


Herverpakken en herfabriceren

|           |    |
|-----------|----|
| Terugname | No |
|-----------|----|

Dimensions Drawings

Dimensions

---

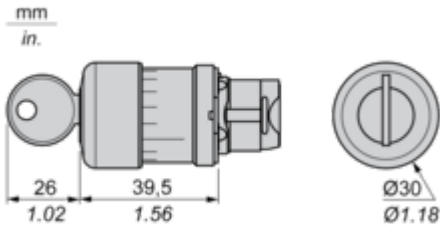

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support  
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.  
(3) Ø22.5 mm recommended ( $\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in.} \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

Detail of Lug Recess



- (1) Diameter on finished panel or support  
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.  
(3) Ø22.5 mm recommended ( $\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in.} \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)



A: 30 mm min. / 1.18 in. min.  
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm



A: 30 mm min.  
B: 40 mm min.  
Dimensions in in.



A: 1.18 in. min.  
B: 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2° 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB5AD\*, ZB5AJ\*, ZB5AG\*).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.



- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

**Mounting of Adapter (Socket) ZBZ01•**

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 for centring adapter ZBZ01•
- 3 8  $\times$   $\varnothing$  1.2 mm / 0.05 in. holes
- 4 1 hole  $\varnothing$  2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes  $\varnothing$  2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Code C7

---



Electrical Compositions Corresponding to Code C8

---



Electrical Compositions Corresponding to Code C10

---



Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

---

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

---

Single contact



Double contact



Light block




Possible location



Technical Illustration

Dimensions

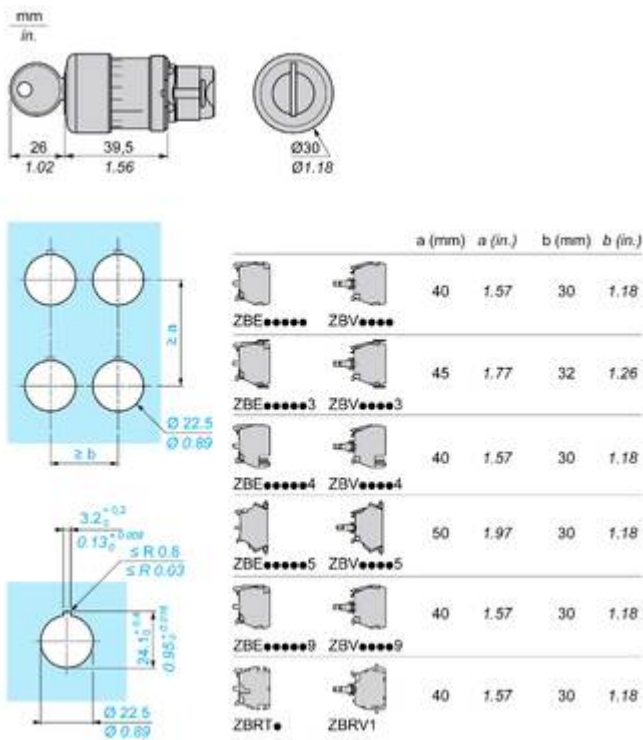

Offer Marketing Illustration

Product benefits / Features

### Features

#### Harmony XB5 e-stop function



Wide modular range to suit machines and operator safety.



Ergonomic design for emergency actuation in several environments



Designed to fit in a standard 22mm cut-out or Harmony XALK control station ensuring compatibility with pre-existing machinery



Large set of accessories: circular legends, illuminated legend rings, protective bellows for harsh environments and protective guards.



Illuminated types to improve operator efficiency by reducing production downtime.




Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5 e-stop function

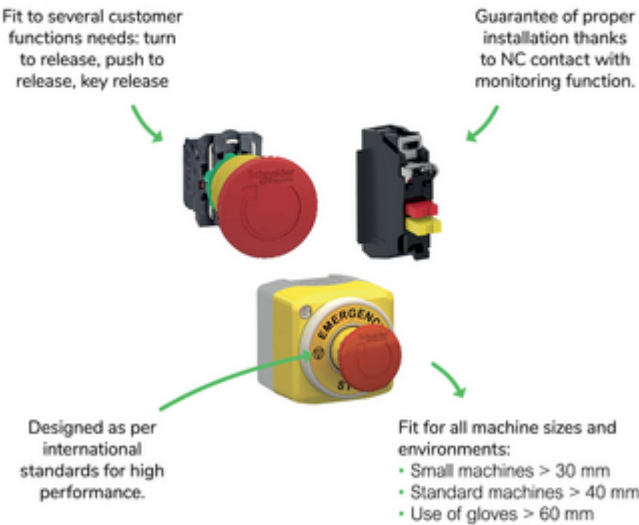


Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB5 e-stop function

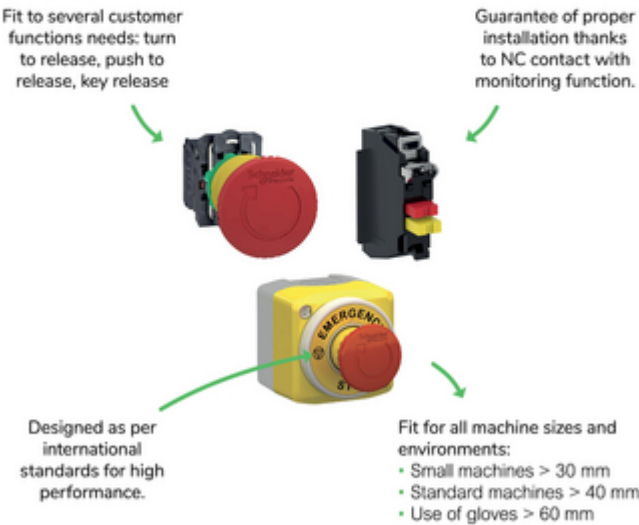

Offer Marketing Illustration

Product benefits / Features

### Features

#### Harmony XB5 e-stop function



Wide modular range to suit machines and operator safety.



Ergonomic design for emergency actuation in several environments



Designed to fit in a standard 22mm cut-out or Harmony XALK control station ensuring compatibility with pre-existing machinery



Large set of accessories: circular legends, illuminated legend rings, protective bellows for harsh environments and protective guards.



Illuminated types to improve operator efficiency by reducing production downtime.



Image of product / Alternate images

Alternative

---


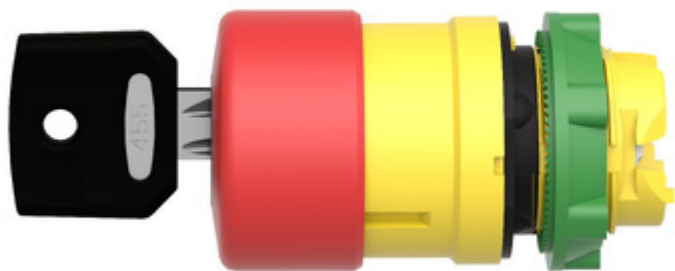






Image of product in real life situation

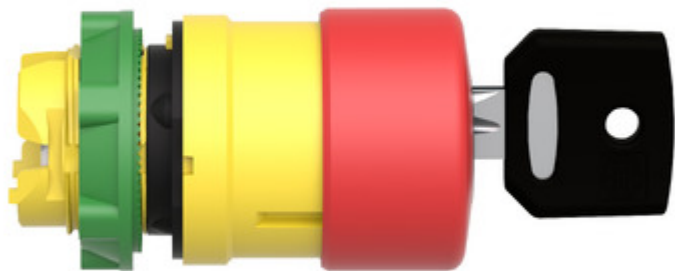