



## Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 3000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark.

## Product Overview

Product name	Resisto 1200 IP66 5000lm 830
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
E-number FI	4357041
Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Glare control	< 24
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey

Light your world

**IP rating**

IP66

**IK rating**

IK08


**Product EAN number**

5410288102092


**Warranty**

5 years

## Photometry

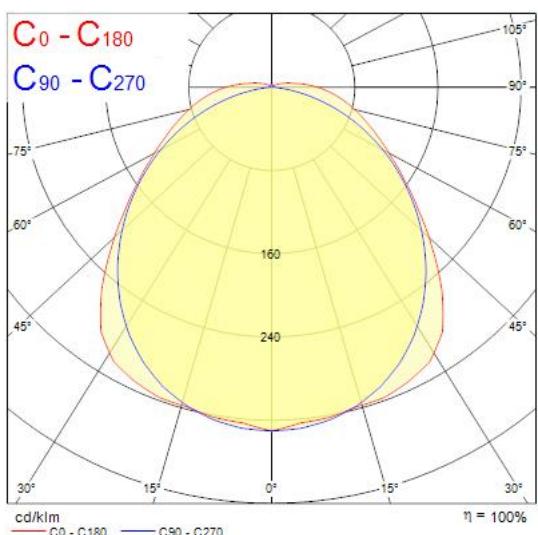

## Technical drawings

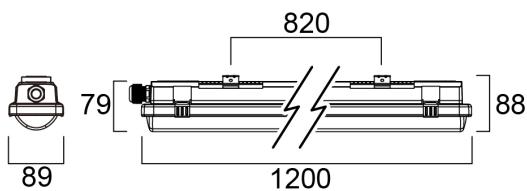

**Light your world**