



### Features

• RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with narrow optics provide homogenous light distribution for aisles and focus areas. Suitable for Central Battery operating. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.

### Product Overview

Product name	RTS 1.5M 70W 12C NR DD CB
Technology	LED
Cap/Base	N/A
Housing	Steel
Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	70
Electrical protection	Class I
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03

## RTS 1.5M 70W 12C NR DD CB 0042602


Product EAN number

5410288426020


Warranty

5 years

### Photometry

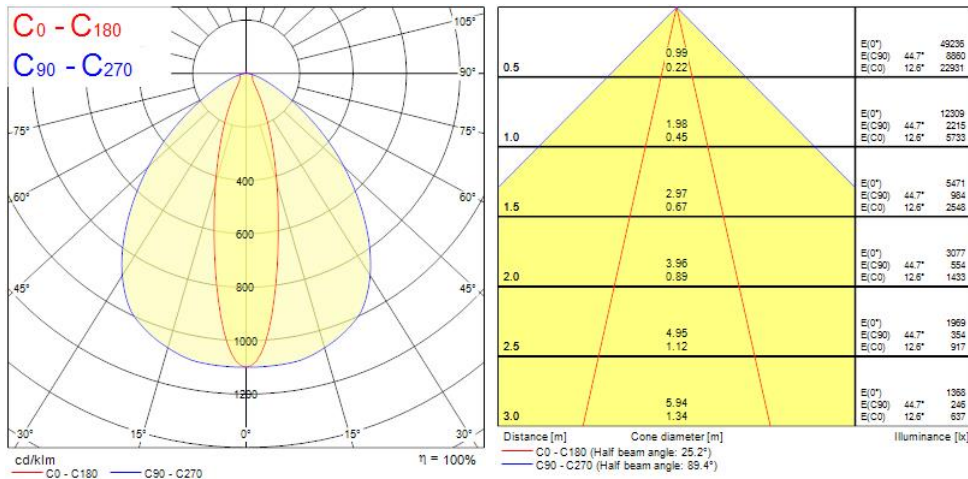

### Technical drawings

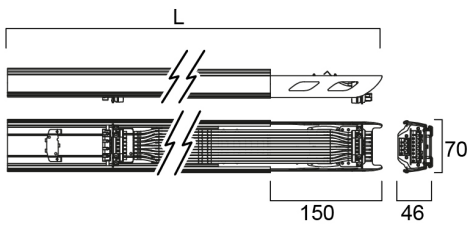

L	600	900	1202	1500	2403	3000	3605	4500
---	-----	-----	------	------	------	------	------	------

### Data table

### GENERAL DATA

Product name	RTS 1.5M 70W 12C NR DD CB
Technology	LED
Cap/Base	N/A
Housing	Steel
Operating temperature range (°C)	-25°C...+30°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	70
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Drive current (mA)	1000
Inrush Current (A)	43.6
Inrush Duration (µs)	188
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)

## LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	79000
Lifespan L80 B20	75000
Lifespan L80 B10	72000
Lifespan L90 B50	37000
Lifespan L90 B20	34000
Lifespan L90 B10	32000

## PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	70.2
Weight (kg)	1.7

## PACKAGING

Single packaging type	Without Packaging
Product EAN number	5410288426020
Packaging single width (cm)	7.5
Packaging single depth (cm)	6.5
DUN14 (outer)	15410288426027
Packaging outer length / height (cm)	157.0

## SAFETY DATA

Optimal operating condition (°C)	-25-30
Special purpose lamp	No
Dry applications use only	No

# SYLVANIA

RTS 1.5M 70W 12C NR DD CB  
**0042602**

Suitable for household illumination

No

**Light your world**