


LiFeSafe SurfaceRoundDownlight IP65 RA C EM3 NM ST
0032008



Features

• LiFeSafe SURF RDDDL IP65 RA C EM3 NM ST is a round surface mount standalone luminaire. Non-maintained self-test 3Hr emergency duration with LiFePO4 rechargeable batteries. Interchangeable lens for open area or corridor beam. 2.2W - 280lm (open area) / 250lm (corridor), 20mm conduit entry points, Class II construction.

Product Overview


Product name	LiFeSafe SurfaceRoundDownlight IP65 RA C EM3 NM ST
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC001957
Luminous flux (lm)	280
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	280
Luminous flux (emergency) (lm)	280
Electrical protection	Class II
Housing colour	RAL9003
IP rating	IP65
IK rating	IK03
Product EAN number	5410288320083

LiFeSafe SurfaceRoundDownlight IP65 RA C EM3 NM ST 0032008

Warranty

5 years

Photometry

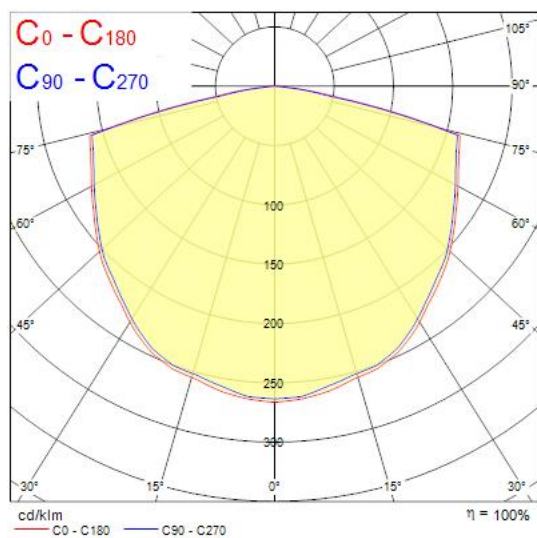

Technical drawings

