

LiFeSafe Downlight RA R EM3 NM ST
0032006



Features

• LiFeSafe Downlight RA R EM3 NM ST is a miniature emergency recessed downlight with interchangeable optics for open area and escape route illumination. Non-maintained self-test 3Hr emergency duration with LiFePO4 rechargeable battery. Self test. Quick and easy installation with driver module and battery pack contained in articulated case that can pass through 44mm cut-out. Suitable for ceiling thickness 5-20mm. 170lm (open area) / 150lm (corridor), 1W, IK03, IP20. Class II electrical construction.


Product Overview

Product name	LiFeSafe Downlight RA R EM3 NM ST
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Light source included	0032006
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC001957
Fixture luminous flux (lm)	170
Luminous flux (lm)	170
Luminaire efficacy (lm/W)	170
Correlated colour temperature (k)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	170
Luminous flux (emergency) (lm)	170
Electrical protection	Class II

LiFeSafe Downlight RA R EM3 NM ST 0032006

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288320069
Warranty	5 years

Photometry

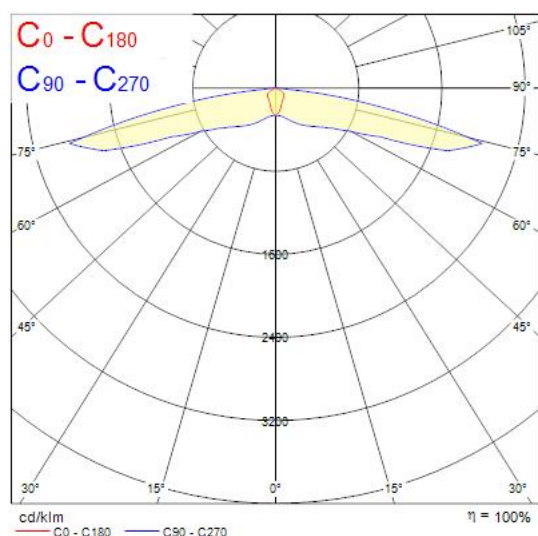

Technical drawings

