



Features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with narrow optics provide homogenous light distribution for aisles and focus areas. Suitable for Central Battery operating. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.

Product Overview

| | |
|---------------------------------|---------------------------|
| Product name | RTS 1.5M 70W 12C NR DD CB |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Fixture luminous flux (lm) | 11200 |
| Luminaire efficacy (lm/W) | 160 |
| Colour temperature (K) | 4000 |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 70 |
| Electrical protection | Class I |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |

RTS 1.5M 70W 12C NR DD CB
0042602


Product EAN number

5410288426020


Warranty

5 years

Photometry

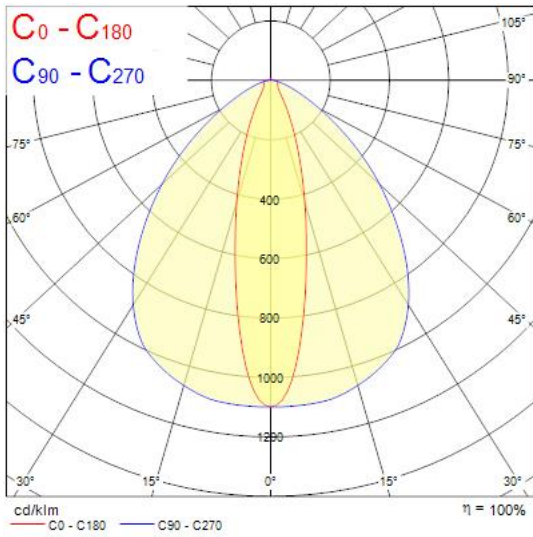

Technical drawings

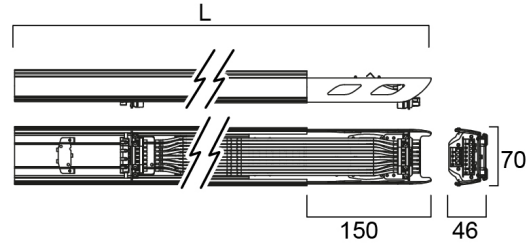

| | | | | | | | | |
|---|-----|-----|------|------|------|------|------|------|
| L | 600 | 900 | 1202 | 1500 | 2403 | 3000 | 3605 | 4500 |
|---|-----|-----|------|------|------|------|------|------|