

Concord

MC2 KIT 2.4M 4K DALIEM WHT PRIS 2071472



Features

- MC2-KIT 2.4M 4K DALIEM WHT PRIS LED luminaire, white RAL9016 finishing, direct distribution, suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 4000K neutral white, total system power: 37W, total fixture output: 4600lm, emergency output: 147lm, luminaire efficacy: 124lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, DALI dimmable, integral emergency: 3 hour maintained, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview


| | |
|----------------------------|--|
| Product name | MC2 KIT 2.4M 4K DALIEM WHT PRIS |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Education, Hospitality, Office, Retail |
| ETIM Class | EC001743 |
| Fixture luminous flux (lm) | 4600 |
| Luminaire efficacy (lm/W) | 124 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |

Concord

MC2 KIT 2.4M 4K DALIEM WHT PRIS 2071472

| | |
|---------------------------------|--------------------|
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 21 |
| Photobiological Risk Group | RG0 |
| Luminous flux (emergency) (lm) | 136 |
| Luminous flux (emergency) (lm) | 136 |
| Total power consumption (W) | 37 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5025768714728 |
| Warranty | 5 years |
| Useful luminous flux (#use) | 4600 |
| Dimming method | DALI |

Photometry

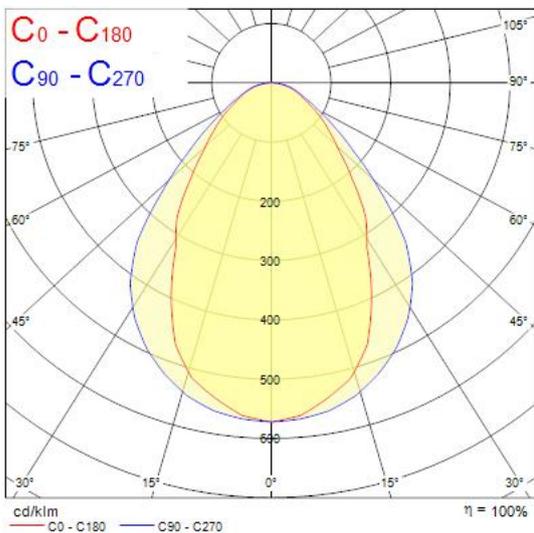

Technical drawings

