

Concord

MC2 KIT 2.4M 3K DALI WHT OPAL 2071474



Features

- MC2-KIT 2.4M 3K DALI WHT OPAL LED luminaire, white RAL9016 finishing, direct distribution, suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 3000K warm white, total system power: 36W, total fixture output: 4600lm, luminaire efficacy: 128lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, DALI dimmable, electrical protection: CLASS I, IP20, suitable for internal environment only.

Product Overview


| | |
|---------------------------------|--|
| Product name | MC2 KIT 2.4M 3K DALI WHT OPAL |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Education, Hospitality, Office, Retail |
| ETIM Class | EC001743 |
| E-number FI | 4170333 |
| Fixture luminous flux (lm) | 4600 |
| Luminaire efficacy (lm/W) | 128 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |

Concord

MC2 KIT 2.4M 3K DALI WHT OPAL 2071474

| | |
|-----------------------------|--------------------|
| Glare control | < 24 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 36 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5025768714742 |
| Warranty | 5 years |
| Useful luminous flux (#use) | 4600 |
| Dimming method | DALI |

Photometry

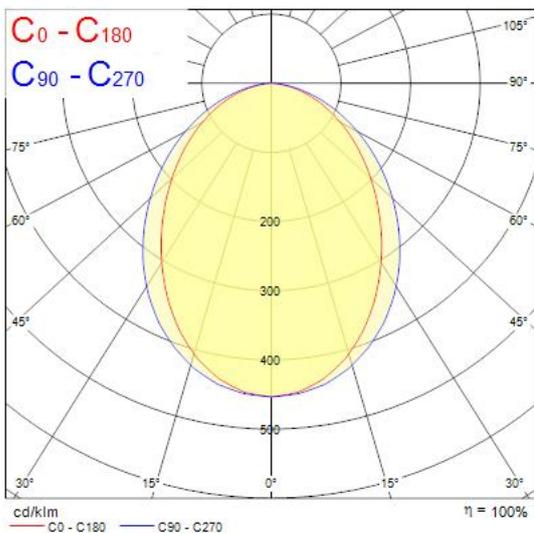

Technical drawings

