


Myriad Deco IP65 White Bezel

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
2058864

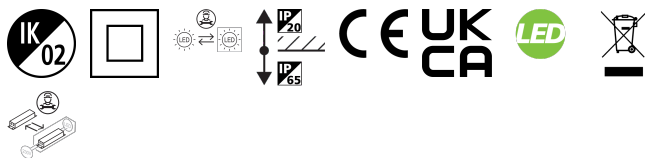

PRODUCT OVERVIEW

Product name	MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Warranty	5 years
Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768588640

DATA TABLE

General data

Product name	MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior

Myriad Deco IP65 White Bezel

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
2058864

Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data


Housing colour	White
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Bezel (or Ring)
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768588640
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768588640
Packaging outer length / height (cm)	17.5

Myriad Deco IP65 White Bezel MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ 2058864

PHOTOMETRY

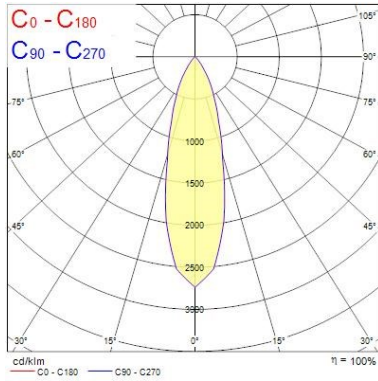

0.5	0.25	E(0°) E(C0)	12380 14.2° 5662
1.0	0.51	E(0°) E(C0)	3096 14.2° 1421
1.5	0.76	E(0°) E(C0)	1977 14.2° 631
2.0	1.01	E(0°) E(C0)	775 14.2° 355
2.5	1.27	E(0°) E(C0)	496 14.2° 227
3.0	1.52	E(0°) E(C0)	344 14.2° 158

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 26.4°)

TECHNICAL DRAWINGS

