

KBS 10 Cable bracket for shooting/screwing 30470

CE 8/2025

Areas of application:

Cable Routing of up to 11 cables (3 x 1.5 mm²) after ceiling installation with all common direct shooting fastening systems.

Installation Guide:

- Attach the KSB to the muzzle of the shooting device and shoot the ESP at the desired location
- Insert the cable/s into the gap between the wall or ceiling
- If required, up to two EC clamps can be attached directly to the KSB (on the sides - any pipe diameter size, at the horns in the middle - only the EC 20)

Product details:

Colour	light grey
Content box	75
Length in mm	100
max. nail thickness	3 mm

Product benefits/properties:


The easy insertion and perfect alignment of up to 11 cables (3 x 1.5 mm²) directly on the ceiling after mounting with all common direct shooting fastening systems. Due to the clamping force of the KBS, despite variable high temperatures a durable installation is always maintained. It is possible to add a 20 mm EC Euro Clip for pipe installation to the centre of the KBS without any drilling. Mounting is also possible with a screw.

Technical data:

Material	PP, UV stabilised Temperature range: -10 °C up to +85 °C silicon-free Material tested according OVE R14 (LSFOH)
----------	---

Weight per piece 8,30 g

GTIN (EAN)

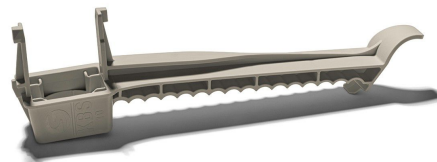

An additional EC Euro-Clip for Pipe installation can be mounted at the center of the KBS.



Schnabl Stecktechnik GmbH, Bahnhofplatz 1, po box 63, 3100 St. Pölten, Austria
Telephone +43 2742 22167-0, office@schnabl.works, www.schnabl.works

