


## Beacon LED

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE BLACK  
2059616

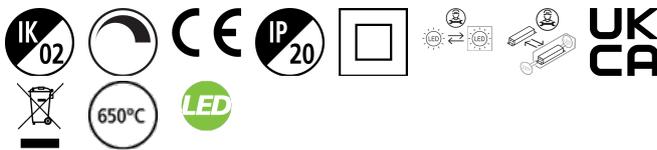

### PRODUCT OVERVIEW

Product name	BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596164

### DATA TABLE

#### General data

Product name	BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium

## Beacon LED

*BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE BLACK*  
2059616

Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48

### Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	44000
Lifespan L90 B20	37000
Lifespan L90 B10	34000

### Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Diameter (mm)	80
Weight (kg)	0.7


## Beacon LED

*BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE BLACK*  
2059616

### Packaging

Single packaging type	Carton
Product EAN number	5025768596164
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596164
Packaging outer length / height (cm)	16.0

### PHOTOMETRY

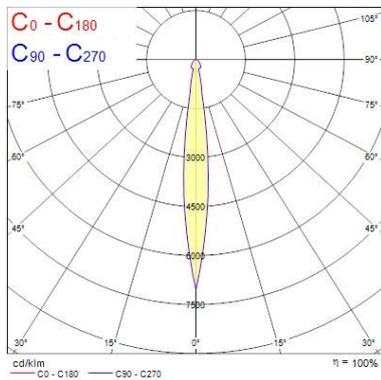

Distance [m]	Cone diameter [m]	E <sub>v</sub> (0°) [lx]	E <sub>v</sub> (CO) [lx]	E <sub>v</sub> (CO) [lx]
0.5	0.11	4266	6.0°	2133
1.0	0.21	1064	6.0°	532
1.5	0.32	474	6.0°	236
2.0	0.42	269	6.0°	132
2.5	0.53	170	6.0°	84
3.0	0.63	119	6.0°	59

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 12.0°)

### TECHNICAL DRAWINGS

