

Optix Surface 1500 Direct - Indirect High Output
OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI
2023772



PRODUCT OVERVIEW

Product name	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	152
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 14
Photobiological Risk Group	RG1
Total power consumption (W)	46
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237722

DATA TABLE

General data	
Product name	OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended

Optix Surface 1500 Direct - Indirect High Output

OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI

2023772

Fixture rating	Enclosed
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7000
Luminaire efficacy (lm/W)	152
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 14
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	46
Primary Supply/Product voltage - min (V)	198.0
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	950
Inrush Current (A)	35
Inrush Duration (µs)	170
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C, C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1410
Nominal Product Width (mm)	200
Weight (kg)	1.6

Optix Surface 1500 Direct - Indirect High Output

OPTIX SURFACE 1500x200 2 LINE D/I HO 4000K ALU DALI
2023772


Packaging

Single packaging type	Carton
Product EAN number	5025768237722
Packaging single width (cm)	22.5
Packaging single depth (cm)	6.8
DUN14 (outer)	05025768237722
Packaging outer length / height (cm)	147.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

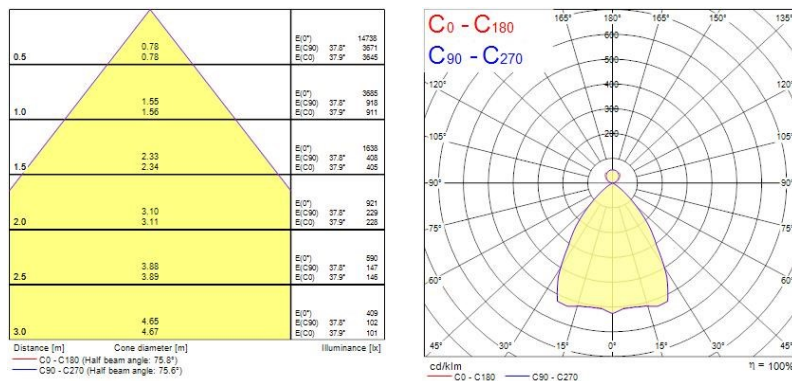

TECHNICAL DRAWINGS

