

19137000	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-B 32 SG	

Description

- The large, robust housing for two inserts of size 16



General Characteristics

Series	H-B 32
Version	Surface-mount base
Locking	Double lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials / Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Stainless Steel
Sealing	NBR

Standard

Safety Standard	IEC 61984
-----------------	-----------

Approvals



UL-Approval, E-File-Number	UL in preparation
----------------------------	-------------------

Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19137000	EPIC H-B 32 SGR M32	M32	-
19146400	EPIC H-B 32 SGR M40	M40	-
19138000	EPIC H-B 32 SGRL M32	M32	M32
19145400	EPIC H-B 32 SGRL M40	M40	M40

19137000	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-B 32 SG	

Technical Drawings

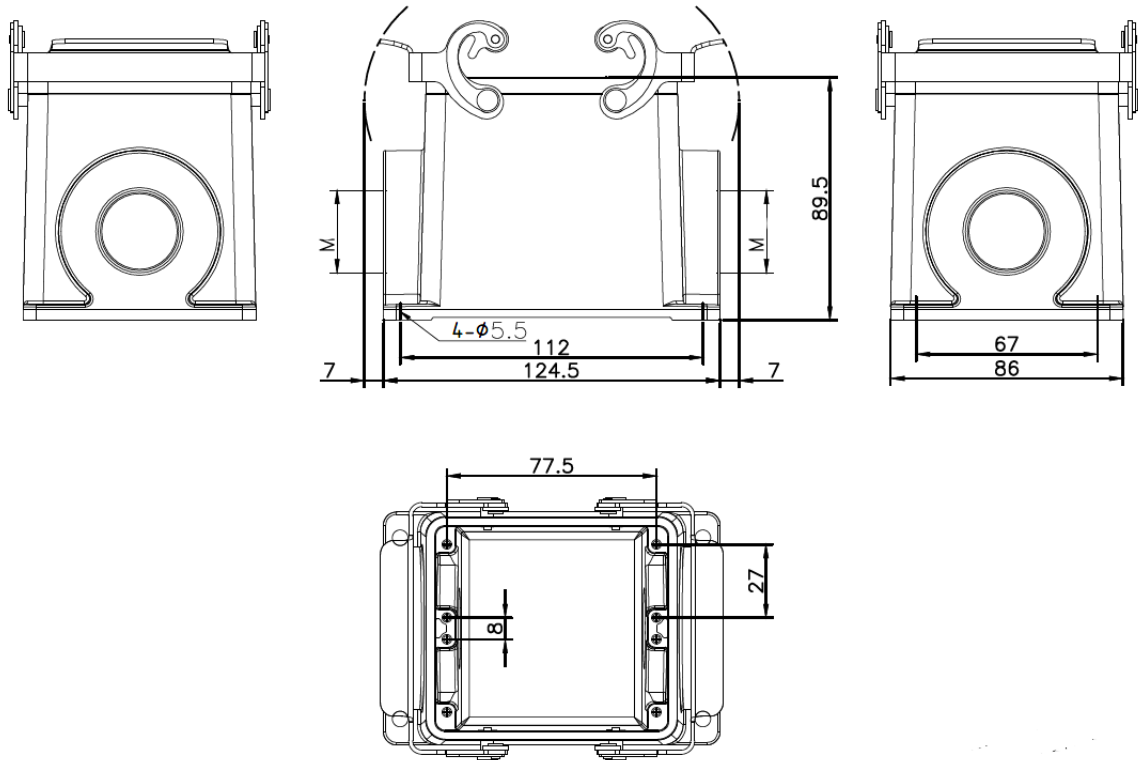

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Plant engineering, Control engineering, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19137000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------