

10132000	DATA SHEET	
Valid from: 29.06.2026	EPIC® H-B 32 AG	

Description

- The large, robust housing for two inserts of size 16



General Characteristics

Series	H-B 32
Version	Panel mount base
Locking	Double lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials / Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Stainless steel, galvanized
Sealing	NBR

Approvals

UL File Number	In preparation
----------------	----------------


Standard

Safety Standard	IEC 61984
-----------------	-----------

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB10132000EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

10132000	DATA SHEET	
Valid from: 29.06.2026	EPIC® H-B 32 AG	

Technical Drawings

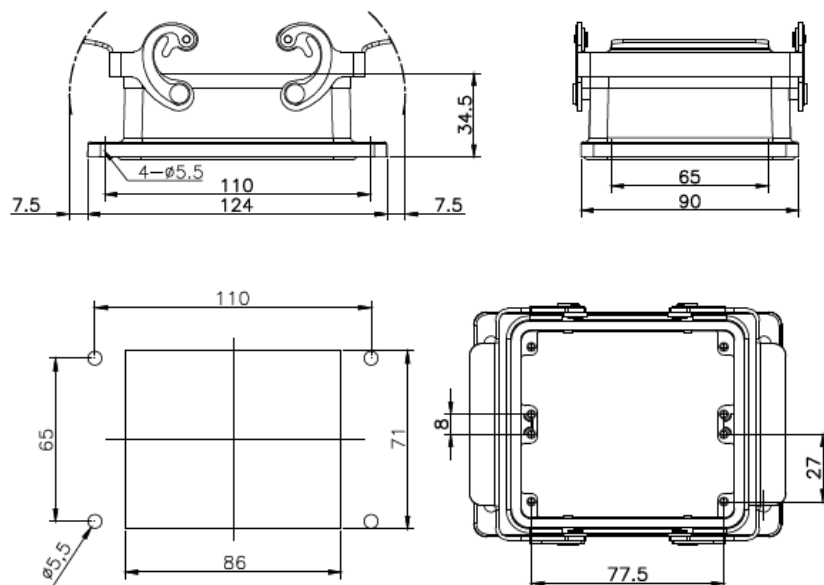

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Plant engineering, Control engineering, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB10132000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------