

Resisto Throughwiring  
Resisto 1200 IP66 5000lm 840 5xTH  
0010217



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; through wiring.



PRODUCT OVERVIEW

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Product name                    | Resisto 1200 IP66 5000lm 840 5xTH                         |
| Technology                      | LED                                                       |
| Cap/Base                        | N/A                                                       |
| Housing                         | PC Polycarbonate                                          |
| Mount                           | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application             | Logistics & Industry                                      |
| ETIM Class                      | EC002892                                                  |
| E-number FI                     | 4357047                                                   |
| Warranty                        | 5 years                                                   |
| Fixture luminous flux (lm)      | 5050                                                      |
| Luminaire efficacy (lm/W)       | 140                                                       |
| Colour temperature (K)          | 4000                                                      |
| CRI (Ra)                        | 80                                                        |
| Colour Variation Initial (SDCM) | SDCM5                                                     |
| Colour Consistency (SDCM)       | 5                                                         |
| Beam Angle (°)                  | 110                                                       |
| Glare control                   | < 24                                                      |
| Photobiological Risk Group      | RG1                                                       |
| Total power consumption (W)     | 36                                                        |
| Electrical protection           | Class I                                                   |
| Control gear type               | LED driver constant current                               |
| Dimmable                        | No                                                        |
| Dimming method                  | N/A                                                       |
| LED Flickering Rate             | Ultra low (5% or less)                                    |
| Housing colour                  | Grey                                                      |
| IP rating                       | IP66                                                      |
| IK rating                       | IK08                                                      |
| Product EAN number              | 5410288102177                                             |

DATA TABLE

|              |                                   |
|--------------|-----------------------------------|
| General data |                                   |
| Product name | Resisto 1200 IP66 5000lm 840 5xTH |
| Technology   | LED                               |

## Resisto Throughwiring

Resisto 1200 IP66 5000lm 840 5xTH

0010217

|                                         |                                                           |
|-----------------------------------------|-----------------------------------------------------------|
| Cap/Base                                | N/A                                                       |
| Housing                                 | PC Polycarbonate                                          |
| Mount                                   | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application                     | Logistics & Industry                                      |
| Operating temperature range (°C)        | -20°C...+40°C                                             |
| Performance ambient temperature Tq (°C) | 25                                                        |
| ETIM Class                              | EC002892                                                  |
| E-number FI                             | 4357047                                                   |
| Warranty                                | 5 years                                                   |

### Optical data

|                                 |         |
|---------------------------------|---------|
| Fixture luminous flux (lm)      | 5050    |
| Luminaire efficacy (lm/W)       | 140     |
| Colour temperature (K)          | 4000    |
| CRI (Ra)                        | 80      |
| Colour Variation Initial (SDCM) | SDCM5   |
| Colour Consistency (SDCM)       | 5       |
| Beam Angle (°)                  | 110     |
| Distribution type               | Diffuse |
| Glare control                   | < 24    |
| Photobiological Risk Group      | RG1     |

### Electrical data

|                                                                |                             |
|----------------------------------------------------------------|-----------------------------|
| Total power consumption (W)                                    | 36                          |
| Primary Supply/Product voltage - min (V)                       | 220                         |
| Primary Supply/Product voltage - max (V)                       | 240                         |
| Lamp power factor                                              | 1                           |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x % | 20                          |
| Electrical protection                                          | Class I                     |
| Control gear type                                              | LED driver constant current |
| No. Of switching cycles before premature failures              | >50000                      |
| Dimmable                                                       | No                          |
| Dimming method                                                 | N/A                         |
| Drive current (mA)                                             | 350                         |
| Inrush Current (A)                                             | 5.5                         |
| Inrush Duration (µs)                                           | 20                          |
| Glow Wire Test (°C)                                            | 850                         |
| Energy Efficiency Class (A->G) of contained light source       | D                           |
| Nominal Frequency (Hz)                                         | 50/60Hz                     |
| LED Flickering Rate                                            | Ultra low (5% or less)      |
| Max. products per 10A C Breaker                                | 41                          |
| Max. products per 13A C Breaker                                | 53                          |
| Max. products per 16A C Breaker                                | 65                          |
| Max. products per 20A C Breaker                                | 82                          |
| Max. products per 10A B Breaker                                | 41                          |
| Max. products per 13A B Breaker                                | 53                          |

## Resisto Throughwiring

*Resisto 1200 IP66 5000lm 840 5xTH*

0010217

|                                                              |     |
|--------------------------------------------------------------|-----|
| Max. products per 16A B Breaker                              | 65  |
| Max. products per 20A B Breaker                              | 82  |
| Connectable conductor cross section - Max (mm <sup>2</sup> ) | 2.5 |

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B20 | 69000  |
| Lifespan L90 B10 | 31000  |

### Physical data

|                             |                  |
|-----------------------------|------------------|
| Housing colour              | Grey             |
| IP rating                   | IP66             |
| IK rating                   | IK08             |
| Diffuser finish             | Frosted          |
| Diffuser material           | PC Polycarbonate |
| Nominal Product Length (mm) | 1200             |
| Nominal Product Width (mm)  | 87               |
| Nominal Product Height (mm) | 80               |
| Weight (kg)                 | 1.72             |

### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288102177  |
| Packaging single length / height (cm) | 120.5          |
| Packaging single width (cm)           | 10.0           |
| Packaging single depth (cm)           | 8.5            |
| DUN14 (outer)                         | 05410288102177 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 120.5          |
| Packaging outer width (cm)            | 10.0           |
| Packaging outer depth (cm)            | 8.5            |


### Safety data

|                                  |        |
|----------------------------------|--------|
| Optimal operating condition (°C) | -20-40 |
|----------------------------------|--------|

## PHOTOMETRY

# Resisto Throughwiring

*Resisto 1200 IP66 5000Im 840 5xTH*  
0010217

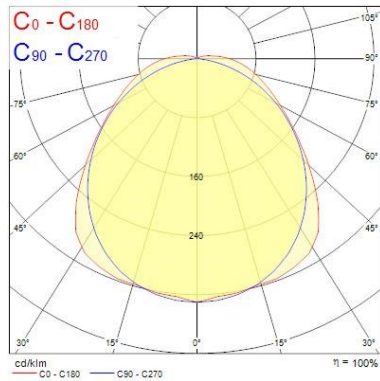

| Distance [m] | Cone diameter [m] | Illuminance [lx]     |
|--------------|-------------------|----------------------|
| 0.5          | 1.32<br>1.35      | 5071<br>5100<br>5130 |
| 1.0          | 2.63<br>2.69      | 1268<br>1280<br>1292 |
| 1.5          | 3.95<br>4.04      | 541<br>550<br>559    |
| 2.0          | 5.27<br>5.39      | 241<br>245<br>249    |
| 2.5          | 6.59<br>6.73      | 157<br>161<br>165    |
| 3.0          | 7.90<br>8.08      | 105<br>108<br>111    |

## TECHNICAL DRAWINGS

