



Data Sheet | Item Number: 858-153

Basic relay; Nominal input voltage: 230 VAC; 4 changeover contacts; Limiting continuous current: 5 A; with gold contacts; with manual operation; Module width: 22 mm; Module height: 25 mm


<https://www.wago.com/858-153>



Similar to illustration

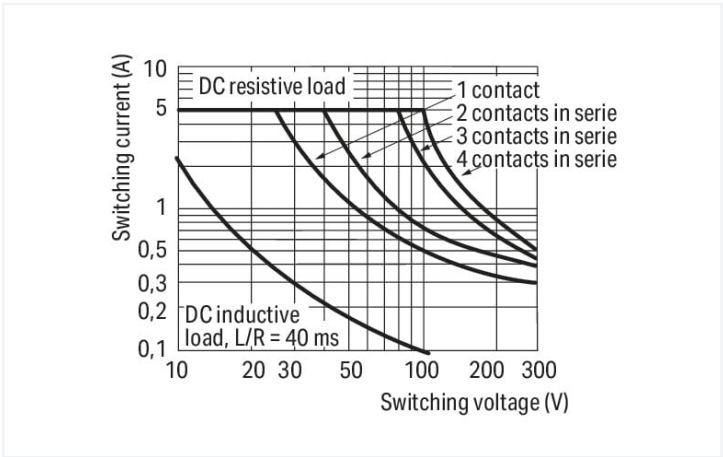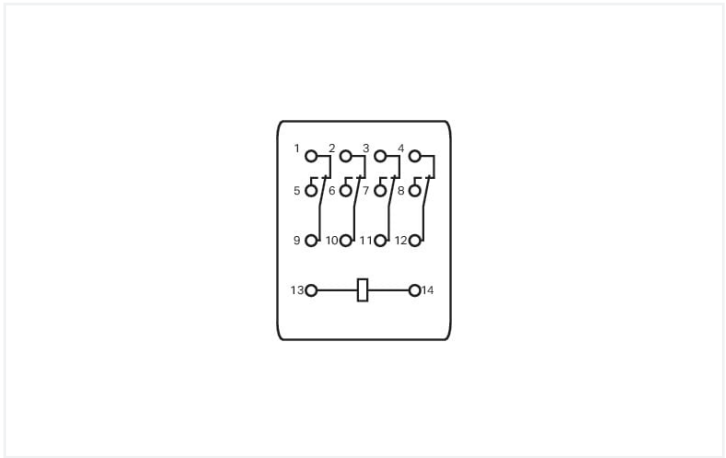

DC load limit curve

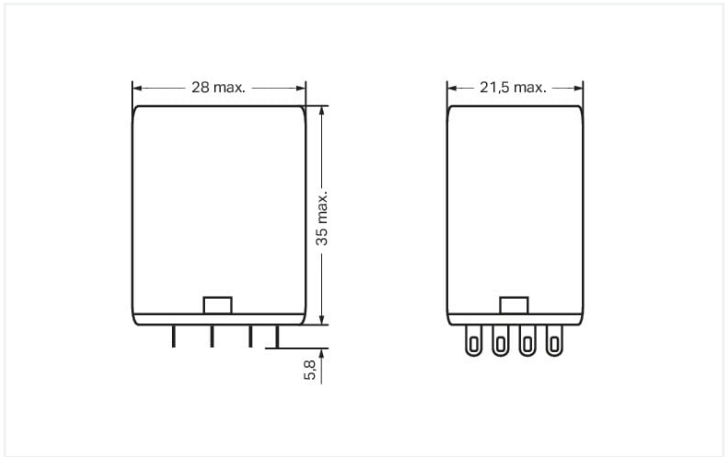

Dimensions in mm

Notes	
Note	To prevent damaging the gold layer, 30 VDC switching voltages and 50 mA currents must not be exceeded. Higher switching power eventually evaporates the gold layer. The resulting deposits in the housing may reduce service life.

Technical data	
Control circuit	
Nominal input voltage U_N	AC 230 V
Nominal input current at U_N	9 mA
Load circuit	
Number of changeover/switchover contacts	4
Contact material (relay)	AgCe + Au
Limiting continuous current	5 A
Inrush current (resistive) max.	(AC) 15 A / 4 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 1250 VA; DC (see load limit curve)
Recommended minimum load	5 V / 1 mA / 50 mW
Pull-in time (typ.)	25 ms
Drop-out time (typ.)	25 ms
Bounce time (typ.)	4 ms
Electrical life (NO; resistive load; 23 °C)	100 x 10 ³ switching operations
Mechanical life	20 x 10 ⁶ switching operations



Signaling	
Status indicator	Red LED Mechanical

Safety and protection	
Dielectric strength (control/load circuit) (AC, 1 min)	1.5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	1.5 kVrms
Protection type	IP20

Physical data	
Width	21.5 mm / 0.846 inches
Height from the surface	35 mm / 1.378 inches
Depth	28 mm / 1.102 inches

Mechanical data	
Mounting type	Pluggable module

Material data	
Fire load	0 MJ
Weight	35 g

Environmental requirements	
Ambient temperature (operation at U_N)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C

Standards and specifications	
Standards/specifications	EN 61810-1

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
PU (SPU)	3 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143531955
Customs tariff number	85364900990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011	EAC RU C-DE.AM02. B.00122/19

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 858-153

↓

Documentation			
Bid Text			
858-153	19.02.2019	xml 4.32 KB	↓
858-153	29.11.2017	doc 27.50 KB	↓

CAD/CAE-Data

CAE data

EPLAN Data Portal
858-153

↓

WSCAD Universe
858-153

↓



1 Compatible Products
1.1 Optional Accessories
1.1.1 Socket
1.1.1.1 Socket without relay



Item No.: 858-100
Relay socket; 4 changeover contacts