# **Product data sheet Spirotech**

Product name

## Secondary vessel 500L for EMCM, ETCM

#### **Product properties**

Secondary expansion vessels for EMCM and ETCM, P max. 0,5 bar / T max.  $70^{\circ}$ C, without level measurement


Article number

### **EP0500RS**

### **Product image**



#### **Product dimensions**

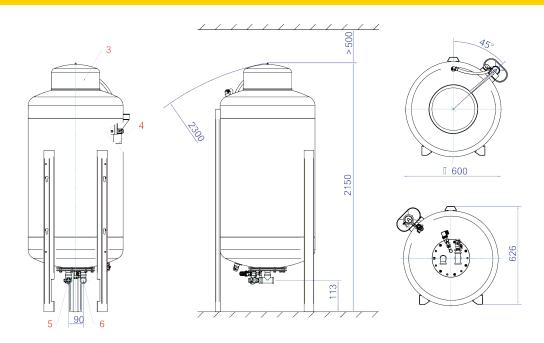



# **Product data sheet Spirotech**

### ETIM product data

| Height                                | 2150 mm     |
|---------------------------------------|-------------|
| Volume                                | 500 I       |
| Colour                                | Other       |
| Diameter                              | 600 mm      |
| Max. operating pressure               | 0.5 bar     |
| With pressure gauge                   | No          |
| With exchangeable membrane            | Yes         |
| Nominal diameter expansion connection | 1 inch (25) |
| Horizontal positioning                | No          |
| Suitable for central heating          | Yes         |
| Vertical positioning                  | Yes         |
| With legs                             | Yes         |

| Material membrane/bladder            | Ethylene-propylene di-<br>ene monomer rubber<br>(EPDM) |
|--------------------------------------|--|
| Flange compression class             | Other  |
| With drain                           | Yes  |
| Tilting height                       | 2180 mm  |
| With safety valve                    | Yes  |
| Max. glycol mixture                  | 60 %   |
| Suitable for tap water               | No   |
| Max. ethanol mixture                 | 60 %   |
| Suitable for solar collector circuit | Yes  |
| Pre-pressure                         | 0 bar  |
| With fixed wall support              | No   |
| Suitable for cooling                 | No   |

#### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.



