

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617



Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1512lm, luminaire efficacy: 72lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Product Overview


| | |
|----------------------------|--|
| Product name | BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Environment | Internal |
| Fixture luminous flux (lm) | 1512 |
| Luminaire efficacy (lm/W) | 72 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 93 |

Concord

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE 2059617

| | |
|-----------------------------|--------------------|
| Colour Consistency (SDCM) | 3 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 21 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768596171 |
| Warranty | 5 years |

Photometry

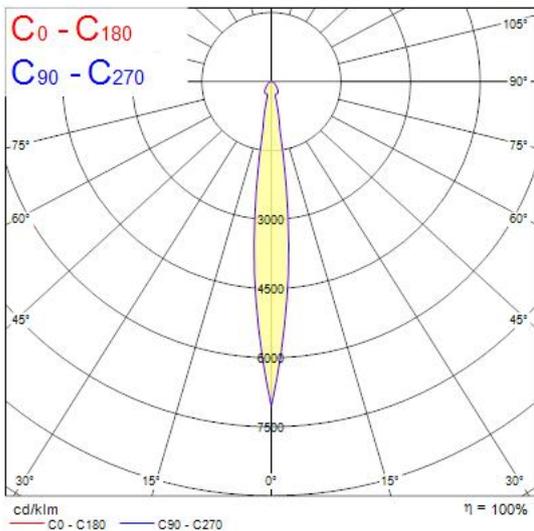

Technical drawings

