

Start Spot IP65 3-CCT
START Spot 620lm 3CCT DIM IP65 WH
0005510



Product features

- Integrated LED recessed spotlight, fixed, phase dimmable, 3 CCT 2700K-3000K-4000K, 100° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, 87mm bezel diameter, 68-74mm cutout, frosted lens. Additional silver or black bezel can be ordered as accessory.




PRODUCT OVERVIEW

Product name	START Spot 620lm 3CCT DIM IP65 WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001744
Warranty	3 years
Useful luminous flux (Fuse)	580
Fixture luminous flux (lm)	620
Luminous flux (lm)	620
Luminaire efficacy (lm/W)	95
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	6.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288055107

PHOTOMETRY

Start Spot IP65 3-CCT
START Spot 620lm 3CCT DIM IP65 WH
0005510

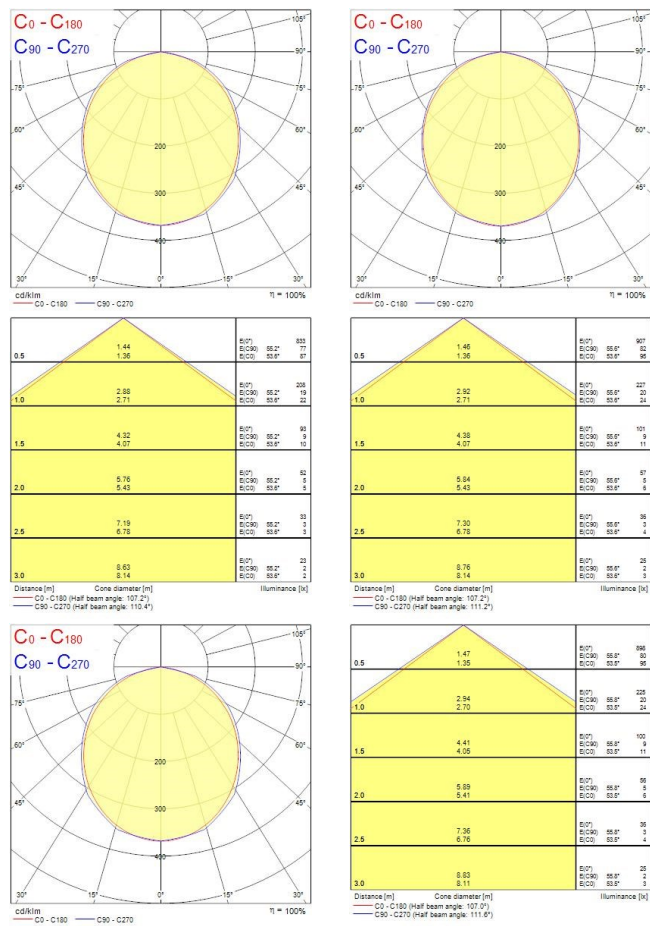

TECHNICAL DRAWINGS

