




## Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent GLS lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- A+ energy rating

## Product Overview

Product name	ToLEDo GLS V6 806LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740502
Luminous flux (lm)	806
Correlated colour temperature (k)	6500
CRI (Ra)	80
Beam Angle (°)	180
Wattage (W)	8.5
Power consumption (W)	8.5
Average life (Nominal) (h)	15000
Product EAN number	5410288266299
Warranty	3 years
Useful luminous flux (#use)	806

## Technical drawings

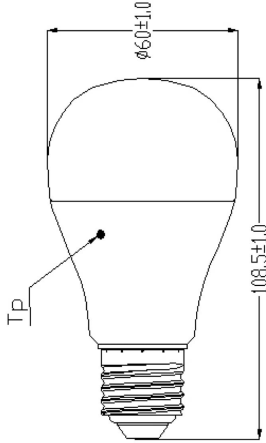

## Data table

### GENERAL DATA

Product name	ToLEDo GLS V6 806LM 865 E27 SL
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740502
Warranty	3 years

### OPTICAL DATA

Useful luminous flux (#use)	806
Luminous flux (lm)	806
Luminous flux (Rated) (lm)	806

## ToLEDo GLS V6 806LM 865 E27 SL 0026629

Correlated colour temperature (k)	6500
CRI (Ra)	80
Beam Angle (°)	180
Lumen maintenance at end of nominal life (%)	70

### ELECTRICAL DATA

Power consumption (W)	8.5
Wattage (W)	8.5
Starting time (max) (s)	0.5
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.5
Control gear required	No
Inrush Current (A)	2.4
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	173
Max. products per 16A C Breaker	278
Max. products per 20A C Breaker	348

### LIFETIME DATA

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### PHYSICAL DATA

Nominal Product Length (mm)	112
Nominal Product Diameter (mm)	60
Weight (kg)	0.053

### PACKAGING

Product EAN number	5410288266299
Packaging single width (cm)	6.4
Packaging single depth (cm)	6.4
DUN14 (inner)	15410288266296

ToLEDo GLS V6 806LM 865 E27 SL  
**0026629**

Units per inner package	6
Packaging inner length / height (cm)	20.4
Packaging inner width (cm)	13.4
Packaging inner depth (cm)	13.7
DUN14 (outer)	25410288266293
Packaging outer length / height (cm)	72.4

## SAFETY DATA

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No
Safety message	Not Suitable for totally enclosed fixtures