

Product data

Product code	VG03-0034	STK-code	1912389	EAN-code	6410019123890
Product name	OJL-connector 280 Green			ETIM class	EC000276
Wires	1xAl/Cu (35-120mm²)/ 2x(6-35 mm²)/ 5x(2,5-16mm²)/ 4x(2,5-10mm²)				

Technical data


Nominal current (IEC)	Cu	280	A
	Al	250	A
Nominal voltage (IEC)		1000	V
		-	
		-	
		-	
Number of poles		1	pcs
Max. Cross section		120	mm²
Tightening torque			
	95-120 mm²	19	Nm
	50-70 mm²	10	Nm
	25-35 mm²	6	Nm
	2,5-16 mm²	3	Nm
Input	1x Al/Cu (35-120mm²)		
Output	2x Cu (6-35 mm²)/ 5x Cu (2,5-16mm²)/ 4x Cu (2,5-10mm²)		
		-	
Operating temperature		80	°C
Weight		178	g
IP-protection		IP20	
Standards	EN 61238-1:2003; EN 60947-7-1:2009		
Color / Material	Green Cover/PC, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium		
Mounting / Connection	DIN rail and 2x screw (M5) mounting		



Description

Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 11 output cables.

Drawing

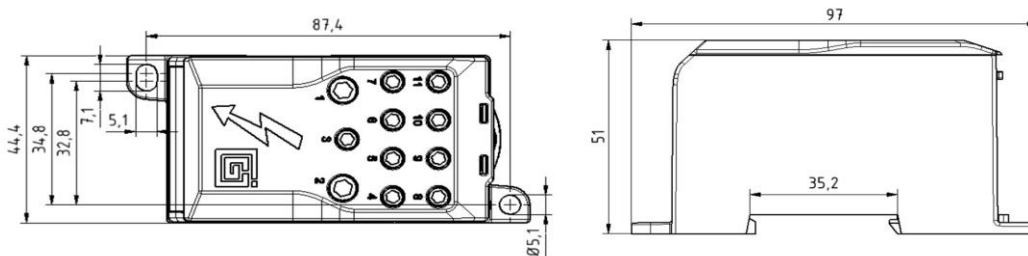

Package

Package	Box	Pcs / Package	12	Weight [kg]	2,30
Length [mm]	205	Width [mm]	180	Height [mm]	135

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi

www.ounevaproducts.fi