

# Concord

## OPTIX LINEAR RECESSED 1200 4000K ALU DALI

2023785



### Features

- OPTIX LINEAR RECESSED 1200 4000K ALU DALI is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1146x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. DALI dimmable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 26W. Luminaire efficacy 131lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection systems.

### Product Overview

<b>Product name</b>	OPTIX LINEAR RECESSED 1200 4000K ALU DALI
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>Fixture luminous flux (lm)</b>	3400
<b>Luminaire efficacy (lm/W)</b>	131
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	26

Concord  
by SYLVANIA


# Concord

OPTIX LINEAR RECESSED 1200 4000K ALU DALI

2023785

Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237852
Warranty	5 years

## Photometry

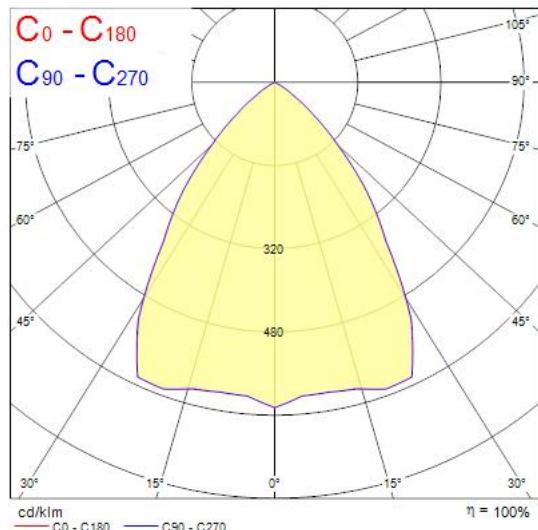

## Technical drawings

