


Optix Linear Recessed 1200
OPTIX LINEAR RECESSED 1200 4000K ALU DALI EM
2023786

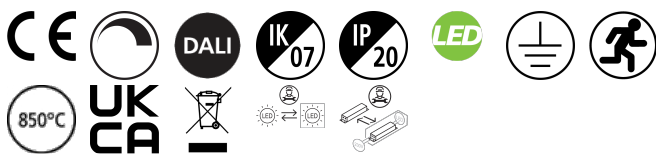


PRODUCT OVERVIEW

Product name	OPTIX LINEAR RECESSED 1200 4000K ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	121
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237869

PHOTOMETRY

Optix Linear Recessed 1200
OPTIX LINEAR RECESSED 1200 4000K ALU DALI EM
2023786

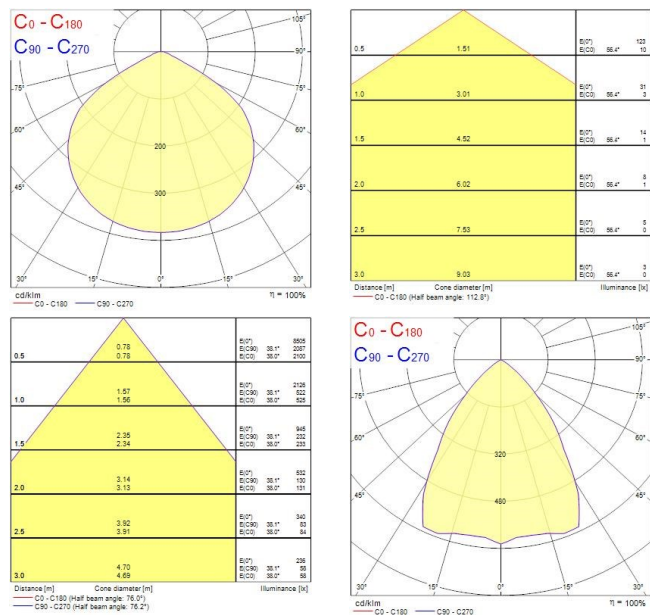

TECHNICAL DRAWINGS

