


**Data Sheet | Item Number: 2020-213/000-036**

2-conductor female connector; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 13-pole; 1,50 mm²; gray, green-yellow

<https://www.wago.com/2020-213/000-036>

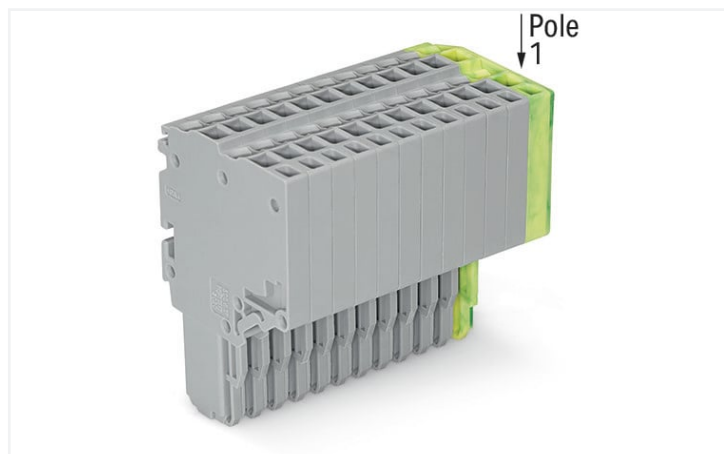

Color: gray/green-yellow

Similar to illustration

### Notes

#### Safety information

According to EN 61984, pluggable connectors without current interrupting capacity must not be mated or unmated when live or under load.

#### Safety information 2

Notice: An appropriate end plate must be applied to the carrier terminal blocks after each female plug.

### Electrical data

| Ratings per          | IEC/EN 61984 |     |    |
|----------------------|--------------|-----|----|
| Overvoltage category | III          | III | II |
| Pollution degree     | 3            | 2   | 2  |
| Nominal voltage      | 500 V        | -   | -  |
| Rated surge voltage  | 6 kV         | -   | -  |
| Rated current        | 13.5 A       | -   | -  |

| Approvals per | UL 1059 |       |       |
|---------------|---------|-------|-------|
| Use group     | B       | C     | D     |
| Rated voltage | 300 V   | 300 V | 300 V |
| Rated current | 15 A    | 15 A  | 15 A  |

| Approvals per | CSA 22.2 No 158 |       |       |
|---------------|-----------------|-------|-------|
| Use group     | B               | C     | D     |
| Rated voltage | 300 V           | 300 V | 300 V |
| Rated current | 10 A            | 10 A  | 10 A  |

### Connection data

|                            |    |
|----------------------------|----|
| Connection points          | 26 |
| Total number of potentials | 13 |

| Connection 1                                               |                                   |
|------------------------------------------------------------|-----------------------------------|
| Connection technology                                      | Push-in CAGE CLAMP®               |
| Actuation type                                             | Operating tool                    |
| Connectable conductor materials                            | Copper                            |
| Nominal cross-section                                      | 1 mm²                             |
| Solid conductor                                            | 0.14 ... 1.5 mm² / 24 ... 16 AWG  |
| Solid conductor; push-in termination                       | 0.5 ... 1.5 mm² / 20 ... 16 AWG   |
| Fine-stranded conductor                                    | 0.14 ... 1.5 mm² / 24 ... 16 AWG  |
| Fine-stranded conductor; with insulated ferrule            | 0.14 ... 0.75 mm² / 24 ... 18 AWG |
| Fine-stranded conductor; with ferrule; push-in termination | 0.5 ... 0.75 mm² / 20 ... 18 AWG  |

### Connection 1

|                                |                                                                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Note (conductor cross-section) | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                   | 9 ... 11 mm / 0.35 ... 0.43 inches                                                                                                |
| Pole number                    | 13                                                                                                                                |
| Wiring direction               | Front-entry wiring                                                                                                                |

### Physical data

|              |                        |
|--------------|------------------------|
| Width        | 46.2 mm / 1.819 inches |
| Height       | 40.5 mm / 1.594 inches |
| Depth        | 25 mm / 0.984 inches   |
| Module width | 3.5 mm / 0.138 inches  |

### Mechanical data

|                          |              |
|--------------------------|--------------|
| Variable coding          | Yes          |
| Marking level            | Side marking |
| Anti-rotation protection | Yes          |

### Plug-in connection

|                                    |                         |
|------------------------------------|-------------------------|
| Contact type (pluggable connector) | Female connector/socket |
| Connector (connection type)        | for conductor           |
| Mismating protection               | No                      |

### Material data

|                             |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | gray/green-yellow                                                                                                      |
| Material group              | I                                                                                                                      |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Fire load                   | 0.588 MJ                                                                                                               |
| Weight                      | 35.4 g                                                                                                                 |

### Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

### Commercial data

|                       |                   |
|-----------------------|-------------------|
| Product Group         | 18 (X-COM-System) |
| eCl@ss 10.0           | 27-14-11-06       |
| eCl@ss 9.0            | 27-14-11-06       |
| ETIM 8.0              | EC001284          |
| ETIM 7.0              | EC001284          |
| PU (SPU)              | 10 pcs            |
| Packaging type        | Box               |
| Country of origin     | DE                |
| GTIN                  | 4050821221890     |
| Customs tariff number | 85366990990       |



| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

Approvals / Certificates

| General approvals                                                                |          |                  | Declarations of conformity and manufacturer's declarations |          |                  |
|----------------------------------------------------------------------------------|----------|------------------|------------------------------------------------------------|----------|------------------|
|  |          |                  |                                                            |          |                  |
| Approval                                                                         | Standard | Certificate Name | Approval                                                   | Standard | Certificate Name |
| CCA<br>DEKRA Certification B.V.                                                  | EN 60947 | NTR NL 7617      | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |
| UL<br>UL International Germany<br>GmbH                                           | UL 1059  | E 45172          | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |

Downloads

| Environmental Product Compliance                        |                                                                                   |
|---------------------------------------------------------|-----------------------------------------------------------------------------------|
| Compliance Search                                       |                                                                                   |
| Environmental Product<br>Compliance<br>2020-213/000-036 |  |

Documentation

| Additional Information |     |            |                                                                                     | Bid Text         |            |                  |                                                                                       |
|------------------------|-----|------------|-------------------------------------------------------------------------------------|------------------|------------|------------------|---------------------------------------------------------------------------------------|
| Technical Section      | pdf | 2240.62 KB |  | 2020-213/000-036 | 19.02.2019 | xml<br>4.01 KB   |  |
|                        |     |            |                                                                                     | 2020-213/000-036 |            | docx<br>15.23 KB |                                                                                       |

CAD/CAE-Data

| CAD data                         |                                                                                     | CAE data                              |                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|
| 2D/3D Models<br>2020-213/000-036 |  | EPLAN Data Portal<br>2020-213/000-036 |  |
|                                  |                                                                                     | WSCAD Universe<br>2020-213/000-036    |  |
|                                  |                                                                                     | ZUKEN Portal<br>2020-213/000-036      |  |



1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



[Item No.: 216-241](#)  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



[Item No.: 216-242](#)  
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-243](#)  
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

1.1.2 Locking system

1.1.2.1 Locking system



[Item No.: 2022-151](#)  
Locking lever; gray



[Item No.: 2022-152](#)  
Locking lever; orange

1.1.3 Marking

1.1.3.1 Marker



[Item No.: 793-3501](#)  
WMB marking card; as card; plain; snap-on type; white



[Item No.: 2009-113](#)  
WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white

1.1.4 Protective warning marker

1.1.4.1 Cover



[Item No.: 2000-115](#)  
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.1.5 Screwless end stop

1.1.5.1 Mounting accessories



[Item No.: 249-117](#)  
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[Item No.: 249-116](#)  
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.6 Strain relief

1.1.6.1 Strain relief plate



**Item No.: 734-326**  
Strain relief plate; for female and male connectors; 35 mm wide; 1 part; gray

1.1.7 Tool

1.1.7.1 Operating tool



**Item No.: 210-719**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft



**Item No.: 210-648**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short



**Item No.: 210-647**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

Installation Notes


Coding



Insert coding pin into the corresponding slot and twist it off.



Coding a female plug: remove coding finger using a suitable tool.



Insert coded female plug into X-COM®S-SYSTEM terminal block assembly.