


Concord

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ 2058864

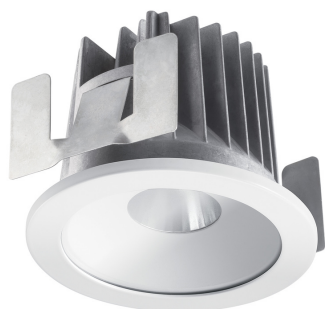

Features

- MYRD IP ST 4K PHDM WHT WBEZ

Product Overview

Product name	MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP65/20
IK rating	IK02

Concord

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ 2058864


Product EAN number

5025768588640

Warranty

5 years

Photometry

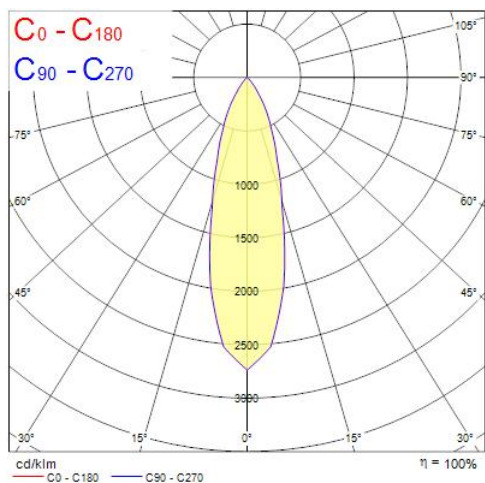


0.5	0.25	E(0°) E(C0)	12393 5662
1.0	0.51	E(0°) E(C0)	3098 1421
1.5	0.76	E(0°) E(C0)	1377 631
2.0	1.01	E(0°) E(C0)	775 365
2.5	1.27	E(0°) E(C0)	496 227
3.0	1.52	E(0°) E(C0)	344 158

Distance [m] Cone diameter [m] Illuminance [lx]

— C₀ - C₁₈₀ (Half beam angle: 28.4°)

Technical drawings

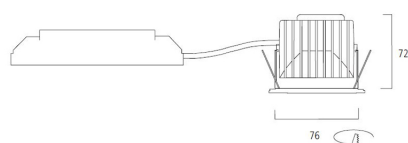

Dimensions (mm)

Data table

Concord

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ 2058864

GENERAL DATA

Product name	MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Concord

MYRIAD DECO IP65 SPOT 4000K PHDM WHITE WBEZ 2058864

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

PHYSICAL DATA

Housing colour	White
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Bezel (or Ring)
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

PACKAGING

Single packaging type	Carton
Product EAN number	5025768588640
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768588640
Packaging outer length / height (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No