



Features

- Linear LED Luminaire, RAL9011 (black) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, opal diffuser, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), DALI driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip switch in direct mode (24-26W), max system power: 26W, max fixture output: 2900lm @ 4000K CCT, efficacy at max output 112lm/W, additional 2-steps power dip switch when indirect module added (36-39W), max system power in D/I combination: 39W, max fixture output: 4600lm @ 4000K CCT, efficacy at max output 118lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Product Overview


Product name	OTAO LINEAR 1.2 OPAL 830/840 DALI BK
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
General application	Office, Education

Light your world


OTAO LINEAR 1.2 OPAL 830/840 DALI BK 0040801

ETIM Class	EC002892
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	112
Correlated colour temperature (K)	4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9011
IP rating	IP20
IK rating	IK03
Product EAN number	5410288408019
Warranty	5 years
Dimming method	DALI-2

Photometry

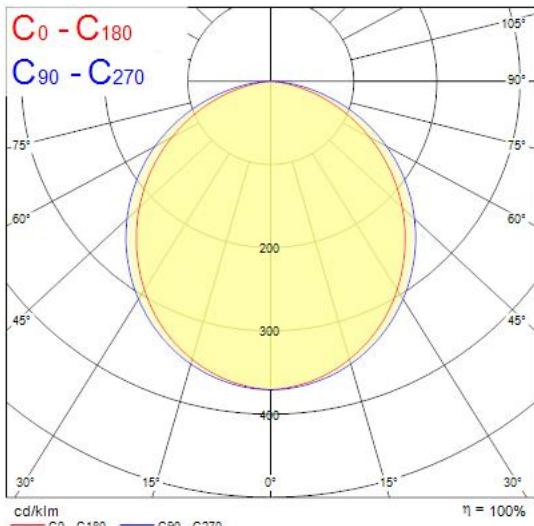

Technical drawings

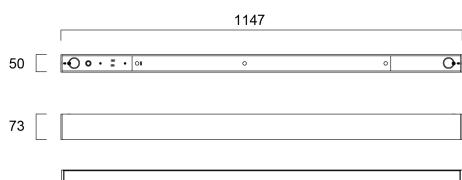

Light your world