


Walraven starQuick® Clamp (White)

(C0510)

for securing conduits and pipes to walls, floors, or ceilings

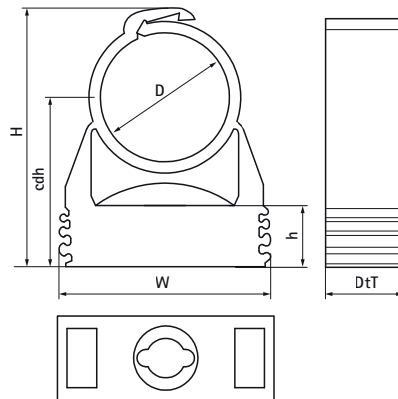

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), white (according to RAL 9003)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



| Product Number | Fixing Hole | Total Height | Total Width | Total Depth | Clamp Center Distance Height | Height | Connection Thread | Maximum Allowed Load F _{a,z} | Breaking Load F _{b,z} |
|------------------|-------------|--------------|-------------|-------------|------------------------------|--------|-------------------|---------------------------------------|--------------------------------|
| Reference letter | FH | H | W | DtT | cdh | h | G | F _{a,z} | F _{b,z} |
| Unit description | mm | mm | mm | mm | mm | mm | | N | N |
| 0855010 | 8 | 34 | 29 | 17 | 24 | 12.1 | None | 500 | 500 |
| 0855012 | 8 | 36 | 29 | 17 | 25 | 10.6 | None | 180 | 550 |
| 0855015 | 8 | 36 | 29 | 17 | 25 | 10.6 | None | 200 | 600 |
| 0855018 | 8 | 40 | 29 | 17 | 27 | 10.6 | None | 230 | 700 |
| 0855022 | 8 | 43 | 29 | 17 | 28 | 10.6 | None | 270 | 800 |
| 0855028 | 8 | 50 | 40 | 18 | 32 | 10.6 | None | 280 | 850 |
| 0855031 | 8 | 55 | 40 | 17 | 36 | 10.6 | None | 300 | 900 |
| 0855035 | 8 | 59 | 43 | 17 | 37 | 10.6 | None | 330 | 1,000 |
| 0855038 | 8 | 68 | 47 | 17 | 44 | 10.6 | None | 330 | 1,100 |
| 0855042 | 8 | 70 | 52 | 17 | 44 | 12.1 | None | 330 | 1,200 |
| 0855050 | 8 | 79 | 57 | 17 | 50 | 12.1 | None | 330 | 1,300 |
| 0855054 | 8 | 82 | 63 | 17 | 50 | 12.1 | None | 330 | 1,400 |
| 0855063 | 8 | 95 | 74 | 20 | 57 | 12.1 | None | 500 | 1,500 |