

### Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5000lm; 38W; 132lm/W; 4000K; SDCM<5; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; SylSmart Standalone enabled.

### Product Overview

<b>Product name</b>	Resisto 1200 IP66 5000lm 840 SSC
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Suspended, Wall surface mounted
<b>Fixture luminous flux (lm)</b>	5000
<b>Luminaire efficacy (lm/W)</b>	132
<b>Colour temperature (K)</b>	4000
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	5
<b>Colour Variation Initial (SDCM)</b>	5
<b>Glare control</b>	< 24
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	38
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	Grey

Light your world


**IP rating** IP65

**IK rating** IK08


**Product EAN number** 5410288102276

**Warranty** 5 years

### Photometry

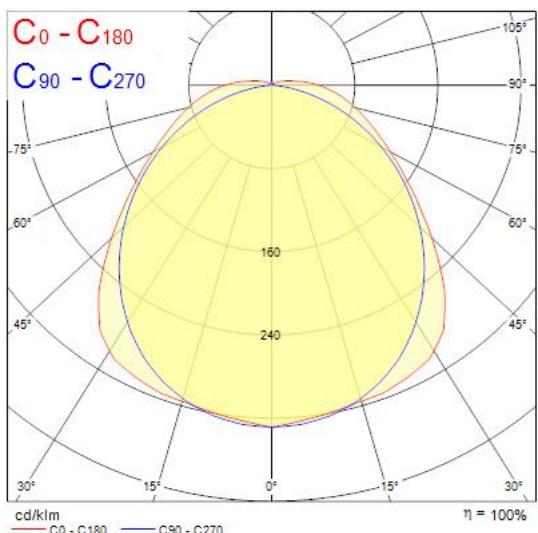

### Technical drawings

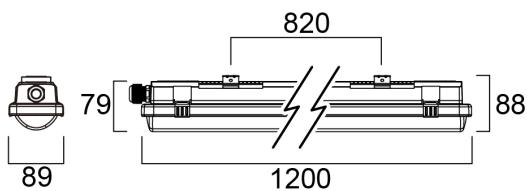

**Light your world**