



### Features

• MC2 D/I 1.2M 3K DALI BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 3000K warm white, total system power: 29W, total fixture output: 3900lm, luminaire efficacy: 134lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.

### Product Overview


|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | MC2 D/I 1.2M 3K DALI BLK OPAL          |
| Technology                      | LED (3 SDCM)                           |
| Cap/Base                        | N/A                                    |
| Housing                         | Aluminium                              |
| Mount                           | Suspended                              |
| General application             | Education, Hospitality, Office, Retail |
| ETIM Class                      | EC001743                               |
| E-number FI                     | 4170322                                |
| Fixture luminous flux (lm)      | 3900                                   |
| Luminaire efficacy (lm/W)       | 134                                    |
| LOR (%)                         | 100                                    |
| Colour temperature (K)          | 3000                                   |
| Light colour                    | Warm White                             |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | 3                                      |

# Concord

## MC2 D/I 1.2M 3K DALI BLK OPAL 2071555

|                             |                    |
|-----------------------------|--------------------|
| Glare control               | < 21               |
| Photobiological Risk Group  | RG0                |
| Total power consumption (W) | 29                 |
| Electrical protection       | Class I            |
| Control gear type           | Electronic ballast |
| Dimmable                    | Yes                |
| Minimum dimming level (%)   | 1                  |
| Housing colour              | Black              |
| IP rating                   | IP20               |
| IK rating                   | IK03               |
| Product EAN number          | 5025768715558      |
| Warranty                    | 5 years            |
| Useful luminous flux (#use) | 3900               |
| Dimming method              | DALI               |

### Photometry

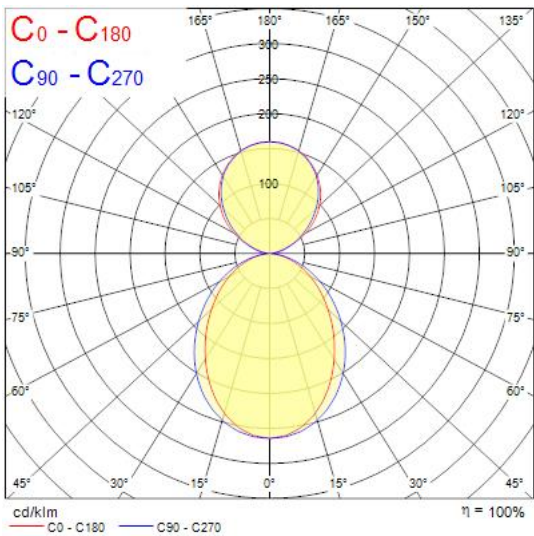

### Technical drawings

