


Optix Linear Recessed 1200

OPTIX LINEAR RECESSED 1200 4000K C9 ALU DALI EM

2023792

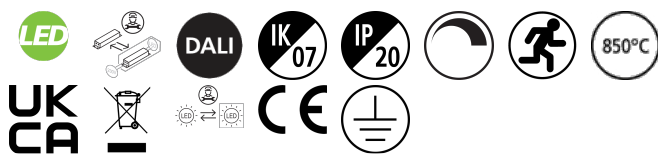


PRODUCT OVERVIEW

Product name	OPTIX LINEAR RECESSED 1200 4000K C9 ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	3650
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237920

PHOTOMETRY

Optix Linear Recessed 1200
OPTIX LINEAR RECESSED 1200 4000K C9 ALU DALI EM
2023792

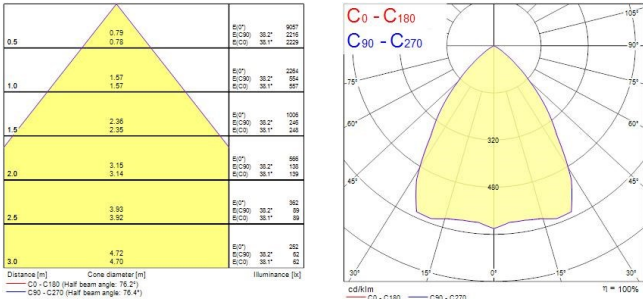

TECHNICAL DRAWINGS

