

# Concord

## BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE 2059621



### Features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1512lm, luminaire efficacy: 72lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, DALI dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit DALI track adaptor, suitable for Concord Lytespan 3+DALI track, ingress protection rating: IP20. **IMPORTANT NOTE:** This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

### Product Overview


Product name	BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1

# Concord


## BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE 2059621

Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596218
Warranty	5 years

### Photometry

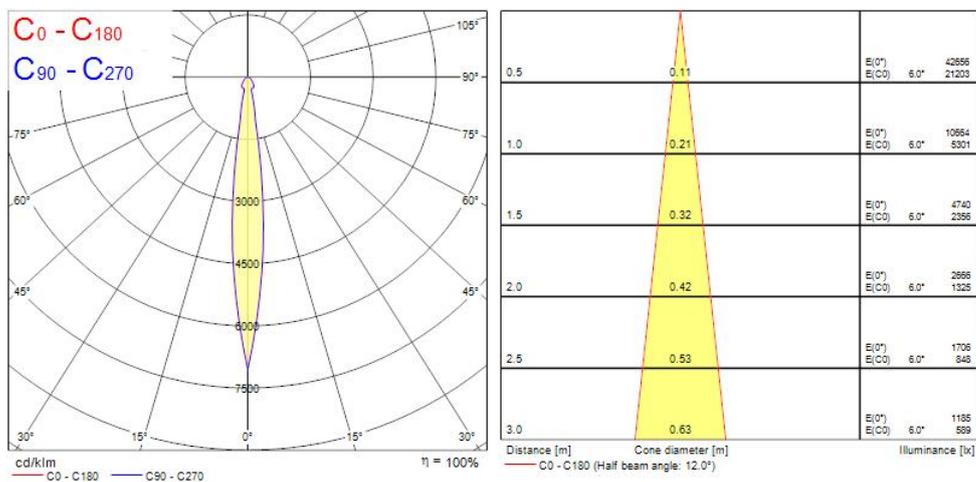

### Technical drawings

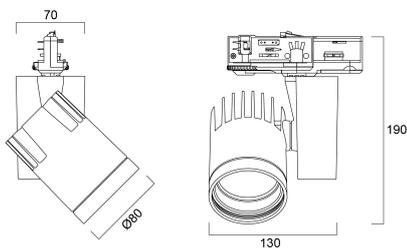

### Data table

# Concord

## BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE 2059621

### GENERAL DATA

Product name	BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	500
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	650

# Concord

## BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE 2059621

Energy Efficiency Class (A->G) of contained light source	E
--	---

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

Max. products per 10A C Breaker	52
---------------------------------	----

### LIFETIME DATA

Lifespan L70 B50	72000
------------------	-------

Lifespan L70 B10	72000
------------------	-------

Lifespan L80 B50	72000
------------------	-------

Lifespan L80 B20	72000
------------------	-------

Lifespan L80 B10	72000
------------------	-------

Lifespan L90 B50	44000
------------------	-------

Lifespan L90 B20	37000
------------------	-------

Lifespan L90 B10	34000
------------------	-------

### PHYSICAL DATA

Housing colour	White
----------------	-------

IP rating	IP20
-----------	------

IK rating	IK02
-----------	------

Nominal Product Width (mm)	130
----------------------------	-----

Nominal Product Diameter (mm)	80
-------------------------------	----

Weight (kg)	0.7
-------------	-----

### PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5025768596218
--------------------	---------------

Packaging single width (cm)	17.6
-----------------------------	------

Packaging single depth (cm)	18.2
-----------------------------	------

DUN14 (outer)	05025768596218
---------------	----------------

Packaging outer length / height (cm)	16.0
--------------------------------------	------

### SAFETY DATA

Special purpose lamp	No
----------------------	----

# Concord

BEACON 93CRI 3K NARROW BEAM L3+DALI WHITE  
**2059621**

Dry applications use only	No
Suitable for household illumination	No