

# Concord

MC2 D/I 1.2M 4K DALIEM BLK OPAL  
2071559



## Features

- MC2 D/I 1.2M 4K DALIEM BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 30W, total fixture output: 4050lm, emergency output: 147lm, luminaire efficacy: 135lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, integral emergency: 3 hour maintained, electrical protection: CLASS I, ingress protection rating: IP20, suitable for internal environment only.

## Product Overview


Product name	MC2 D/I 1.2M 4K DALIEM BLK OPAL
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001743
Fixture luminous flux (lm)	4050
Luminaire efficacy (lm/W)	135
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White

# Concord

## MC2 D/I 1.2M 4K DALIEM BLK OPAL 2071559

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	147
Luminous flux (emergency) (lm)	147
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5025768715596
Warranty	5 years
Useful luminous flux (#use)	4050
Dimming method	DALI

### Photometry

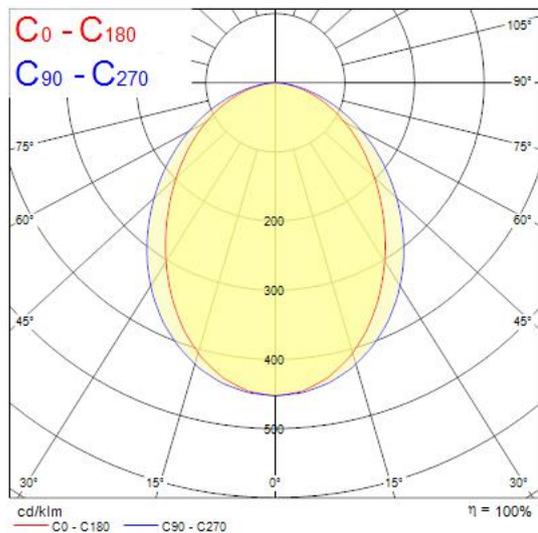

### Technical drawings

