


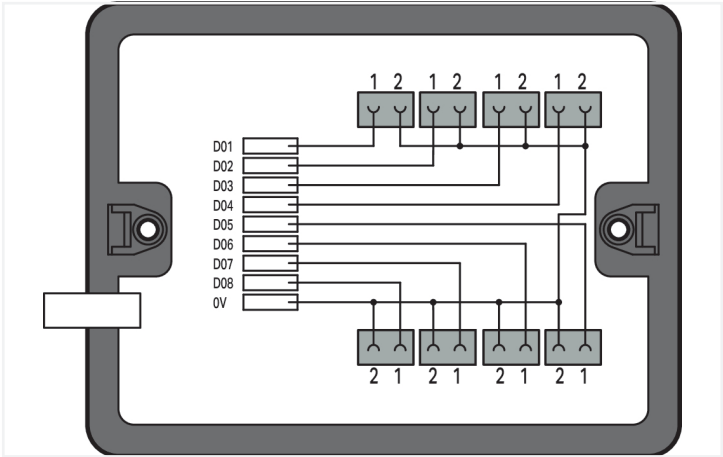

Color: ■ black

Power supply is performed via 9 inline splicing connectors with levers 221-2411.

Application example:
Valves control

Includes: 1 cable clamp and 2 mounting screws

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	250 V
Rated impulse withstand voltage (III / 3)	4 kV
Rated current	6 A

Connection data

Connection 1		Connection 2	
Connection type	Input	Connection type	Output
		Connector	MINI socket, 2-pole (890-242)

Physical data

Width	190 mm / 7.48 inches
Height	30 mm / 1.181 inches
Depth	145 mm / 5.709 inches



Mechanical data	
Internal wiring	0.75 mm²
Use	Supply cable entry
Coding	B
Mounting type	Wall, screw mount Installation on mounting plate

Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Contact Plating	Tin
Fire load	7.298 MJ
Weight	281.4 g

Environmental requirements	
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966816518
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121406
ETIM 9.0	EC002567
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
899-631/461-000

↓



1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



Item No.: 891-8992/005-103
pre-assembled interconnecting cable;
Eca; Socket/plug; 2-pole; Cod. B; Control
cable 2 x 1.0 mm²; 1 m; 1,00 mm²; gray

1.1.2 Male connector/plug



Item No.: 890-252
Plug; 2-pole; 1,50 mm²; gray

1.2 Optional Accessories

1.2.1 Installation

1.2.1.1 Mounting accessories



Item No.: 899-680
Mounting plate; for distribution boxes; gray