


## Walraven RapidStrut® Stainless Steel Connector 90° Rigid

(M6004)

for rigid connections of Strut rails

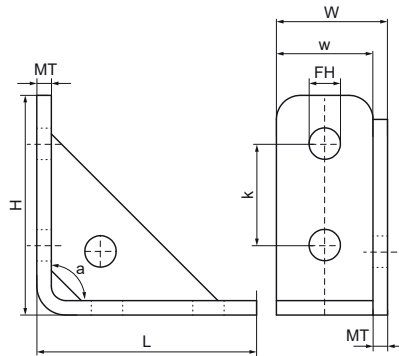

### Features & benefits

- reinforced connector to make rigid fabrications with Walraven RapidStrut® rails
- easy fitting due to rounded edges
- material: stainless steel 1.4404 (A4) - EN 10088, AISI 316L
- Faz: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5).
- Faz2: max. allowed load (with rail 41x41x2.5).
- Fax: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
- Fax2: max. allowed load (with rail 41x41x2.5 and bolted 2 x M12 - 60Nm).



Product Number	VVS Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Maximum Allowed Load Faz	Maximum Allowed Load Fax
<i>Reference letter</i>			<i>a</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>F<sub>a,z</sub></i>	<i>F<sub>a,x</sub></i>
<i>Unit description</i>			°	mm	mm	mm	mm	mm	mm	N	N
66587291	018041895	41x21, 41x41	90	110	44	110	4.00	40	12.2	4,000	3,000