

# Concord

## MC2 D/I KIT 1.2M 4K DALIEM BLK OPAL 2071567



### Features

- MC2-KIT D/I 1.2M 4K DALIEM BLK OPAL LED luminaire, black RAL9005 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 4000K neutral white, total system power: 30W, total fixture output: 4050lm, emergency output: 147lm, luminaire efficacy: 135lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, integral emergency: 3 hour maintained, electrical protection: CLASS I, IP20, suitable for internal environment only.

### Product Overview


Product name	MC2 D/I KIT 1.2M 4K DALIEM BLK OPAL
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001743
Fixture luminous flux (lm)	4050
Luminaire efficacy (lm/W)	135
LOR (%)	100
Colour temperature (K)	4000

# Concord

## MC2 D/I KIT 1.2M 4K DALIEM BLK OPAL 2071567

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	147
Luminous flux (emergency) (lm)	147
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5025768715671
Warranty	5 years
Useful luminous flux (#use)	4050
Dimming method	DALI

### Photometry

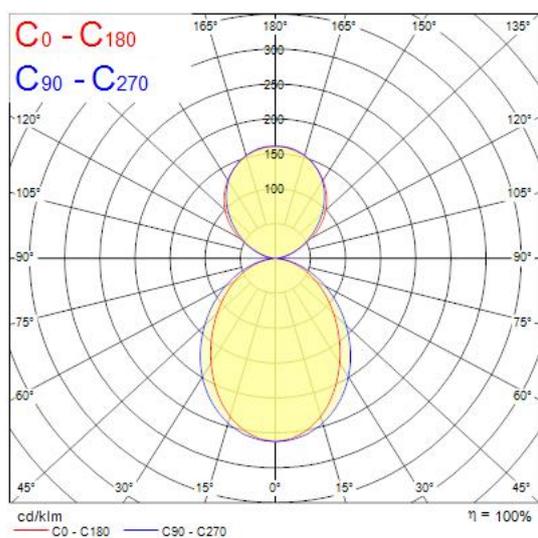

### Technical drawings

