


Mosaic™

LCS3 + Cat. 6 RJ 45 socket


Cat. No(s): 0 765 03/04/05/06/07/22/23/44/46/61/62/63/64

0 765 65/66/81/82/83/91/92/93/94/95/96


0 791 62L/64L/65L - 0 794 61/61L/62/64/65/81/85/86/92



0 765 61

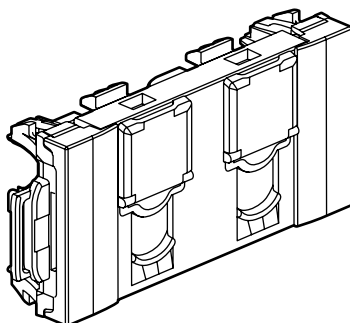

0 765 44



0 765 94

1. USE

Category 6 RJ 45 socket for high speed transmission (Gigabit Ethernet).

The mechanism can be flush-mounted or surface-mounted in 40 mm depth box min.

To be equipped with frame and plates.

Fixing with clips.

Sockets 0 765 81/82/83: This product is made of silver-ion based antimicrobial* material.

This technology eliminates bacteria, fungi and viruses without creating any immunisation or resistance effects (physical, rather than chemical, destruction). Particularly suitable for healthcare establishments (hospitals, clinics, nursing homes, laboratories, waiting rooms, etc.) and more generally for areas subject to hygiene restrictions (industrial, shared and restaurant kitchens, waste, etc.).

This product offers an additional way of ensuring the non-proliferation of bacteria, fungi and viruses without interfering with cleaning protocols.

The connectors are compliant to all performance, mechanical, climatic and electromagnetic requirements of the ISO/IEC 11801-1.

2. RANGE

	Description	White	Aluminium	White antimicrobial*	Mat Black	Black
	Cat. 6 RJ 45 socket - 1 module	0 765 61	0 794 61	0 765 81	0 794 61L	0 794 81
	Cat. 6 RJ 45 socket - 2 modules	0 765 64	0 794 64	-	0 791 64L	-
	Cat. 6 RJ 45 socket with controlled access- 2 modules - with red shutter	0 765 94	-	-	-	-
	Cat. 6 RJ 45 socket inclined at 90° - 2 modules	0 765 91	-	-	-	-
	Cat. 6 RJ 45 socket inclined at 45° - 2 modules	0 765 03	-	-	-	-
	Cat. 6 2 x RJ 45 socket inclined at 45° - 4 modules	0 765 04	-	-	-	-
	Cat. 6 2 x RJ 45 socket - 4 modules	0 765 44	-	-	-	-
	Cat. 6 RJ 45 socket - 1 module	0 765 62	0 794 62	0 765 82	0 791 62L	-
	Cat. 6 RJ 45 socket - 2 modules	0 765 65	0 794 65	-	0 791 65L	0 794 85
	Cat. 6 RJ 45 socket - 2 modules - with green shutter	0 765 22	-	-	-	-
	Cat. 6 RJ 45 socket - 2 modules - with orange shutter	0 765 23	-	-	-	-
	Cat. 6 RJ 45 socket inclined at 90° - 2 modules	0 765 92	0 794 92	-	-	-
	Cat. 6 RJ 45 socket inclined at 45° - 2 modules	0 765 05	-	-	-	-
	Cat. 6 RJ 45 socket with controlled access - 2 modules - with red shutter	0 765 95	-	-	-	-
	Cat. 6 2 x RJ 45 socket inclined at 45° - 4 modules	0 765 06	-	-	-	-
	Cat. 6 RJ 45 socket - 1 module	0 765 63	-	0 765 83	-	-
	Cat. 6 RJ 45 socket - 2 modules	0 765 66	-	-	-	0 794 86
	Cat. 6 RJ 45 socket - controlled access - 2 modules	0 765 96	-	-	-	-
	Cat. 6 RJ 45 socket inclined at 90° - 2 modules	0 765 93	-	-	-	-
	Cat. 6 RJ 45 socket inclined at 45° - 2 modules	0 765 07	-	-	-	-

3. DIMENSIONS (mm)

References	A	B	C	D
0 765 03/ 04/05/06	45	45	25.5	15.5
0 765 07	45	45	27.5	16
0 765 22/23/ 64/65/91/92 - 0 791 64L/65L - 0 794 64/ 65/85/92	45	45	25	11
0 765 44/46	45	106.3	25	11
0 765 61/ 62/81/82 - 0 791 62L - 0 794 61/62/81	45	22.5	25	11
0 765 63/83	45	22.5	31	11
0 765 66/93 0 794 86	45	45	31	11
0 765 94/95	45	45	25	10
0 765 96	45	45	31	10

4. CONNECTION

Connectors accept the following plug types:
RJ11 (4 contacts), RJ12 (6 contacts), RJ45 (9 contacts).

Connectors accept the following cable types:


Connector type	Cable type
UTP	UTP, U/UTP
FTP	FTP, STP, F/UTP, U/FTP, F/FTP, S/FTP, SF/UTP, SF/FTP
STP	

Double colour code T568A and T568B on terminals:

UTP 8 contacts

FTP 9 contacts


STP 9 contacts 360° screen

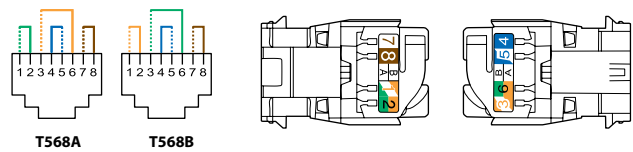

Conductors supported:


- Solid/stranded: 0.4 to 0.65 mm, AWG 26 to 22
- Polyethylene conductor insulation: Ø 0.85 to 1.7 mm on insulation

RJ 45 connectors are equipped with a locking nut that does not require the use of a specific tool and which enables re-cabling in the event of error.

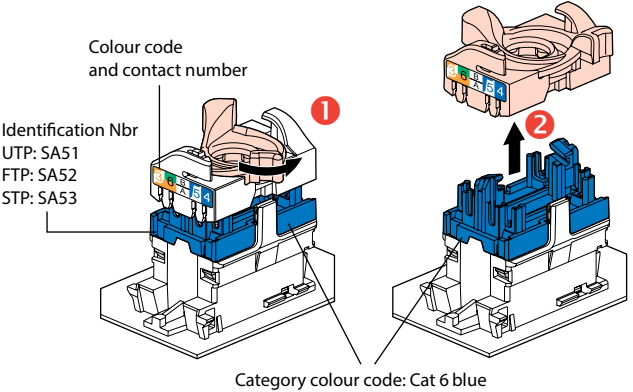

4. CONNECTION (Cont.)

This system allows the wire pairs to be spread easily before mounting them on the connector.

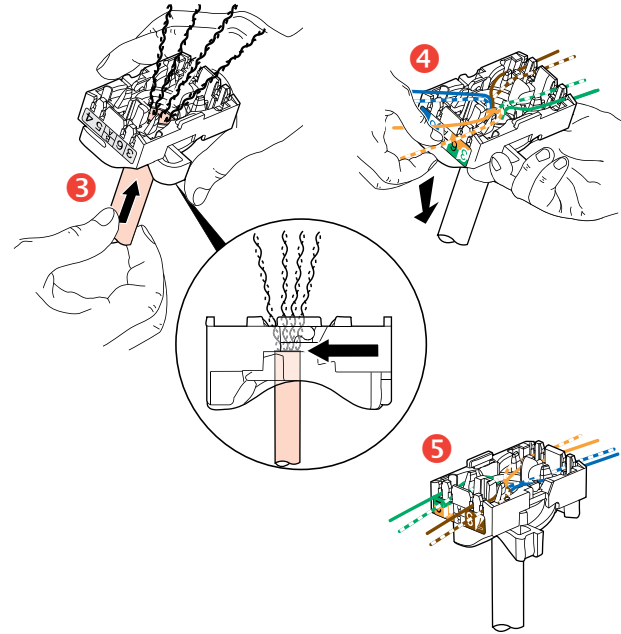


Spreading cables ensures that each pair is separated by the specified 13 mm.


Spreading pairs by 90° in relation to the cable ensures optimum performance.

5. FUNCTION

Operation 0 765 94/95/96

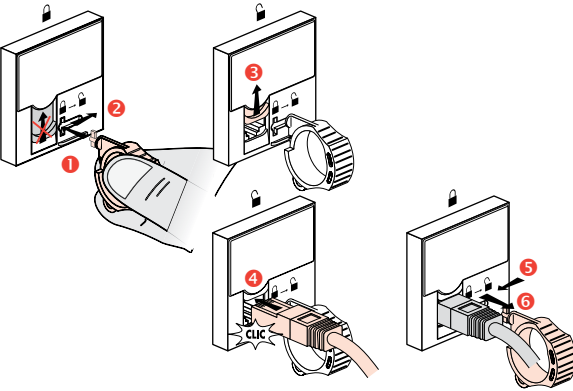

Installation

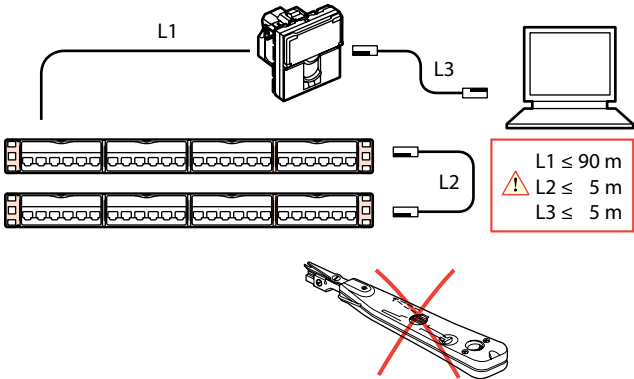

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

- Axial retention of the connector in the adapter: minimum 70N
 - Transverse retention of the connector in the adapter (4 directions): minimum 50N
 - Shock resistance of the connector in the adapter: IK03 or IK04(1) according to IEC 62262
 - Retention of the adapter in the 45x45 Legrand support frame: minimum 100N
 - Retention of the adapter in the 45mm Legrand trunking: minimum 50N
- (1) IK03 for the 2-module, IK04 for the 1-module. Impact applied on the adapter.
Penetration against solid bodies and liquids: IP 20
Maximum 20 cable re-termination according to following options:

Test Method	Cable AWG
IEC 60352-3	22 to 24 ⁽¹⁾
IEC 60352-3	24 to 26 ⁽¹⁾
Single AWG	22 or 23 or 24 or 25 or 26 ⁽²⁾

- (1) Re-termination of any mix of conductor sizes within that range.
(2) Re-termination on only 1 conductor size. No mix allowed.

Endurance: 2500 movements (plug insertion/withdrawal) according to ISO/IEC 11801-1 PL2.

■ 6.2 Material characteristics

Contacts: Gold/nickel, minimum thickness of gold > 0.8 µm
Metal parts: Bronze, nickel, platinum, gold
For STP products the body and the spreader are made of metal alloy with a copper-nickel coating.
Base: Polycarbonate
Cover plate: Polycarbonate
Polycarbonate with antimicrobial* treatment for Cat. Nos 0 765 81/82/83.
Halogen-free
UV-resistant
Self-extinguishing:
850°C/30 s for insulating components holding live parts in place
650°C/30 s for other insulating components

■ 6.3 Electrical characteristics

Breakdown voltage ≥ 1000 V
Contact resistance ≤ 20 mΩ
Insulation resistance ≥ 500 mΩ at 100 Vdc
Tested and independently certified to comply with IEC 60512-99-001 and IEC 60512-99-002 for PoE support up to 90 W (Type 4).

■ 6.4 Climate characteristics

Storage temperature: - 40°C to +70°C
Operating temperature: -10°C to +60°C

7. CLEANING

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

■ 7.1 Resistance to cleaning products

Resistant to the following products: hexane (NF C 61-314), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

■ 7.2 Resistance to hospital grade cleaning products

Resistant to the following products: Anios, Surfanios, Bactilyline, diluted hydrogen peroxide (35%).


Caution: Always test before using other special cleaning products.

8. STANDARDS AND APPROVALS


ISO/IEC 11801 series : International standard for generic cabling for customer premises
ANSI/TIA 568 series : North American standard for generic cabling for customer premises
EN 50173 series : European standard for generic cabling for customer premises
IEC 60603-7 series : International standard for connector specifications
Connectors are compliant to requirements for the following remote powering applications
IEEE 802.3af , IEEE 802.3at , IEEE 802.3bt : “Power over Ethernet”, Types 1 to 4, up to 90 W.
The connectors are compliant NF C90 483.

9. PERFORMANCE AT 20°C


■ 9.1 Component performance (RJ 45 connectors)
Return loss

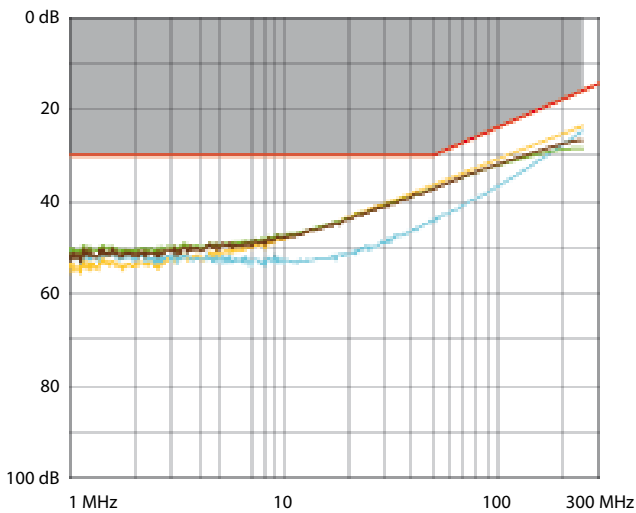

Attenuation

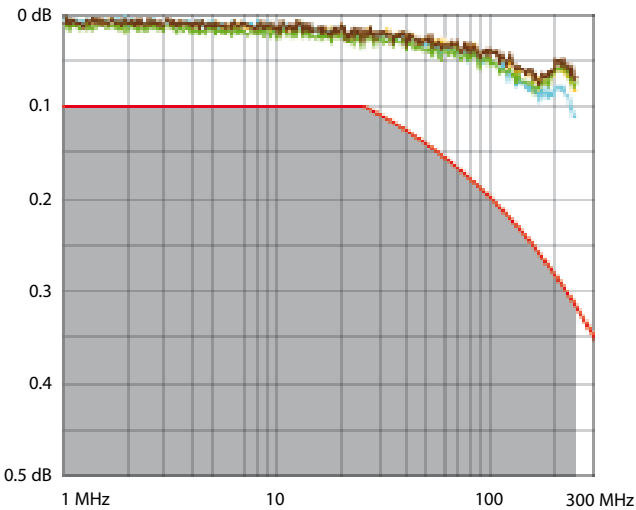


NEXT (Near end Crosstalk Attenuation)

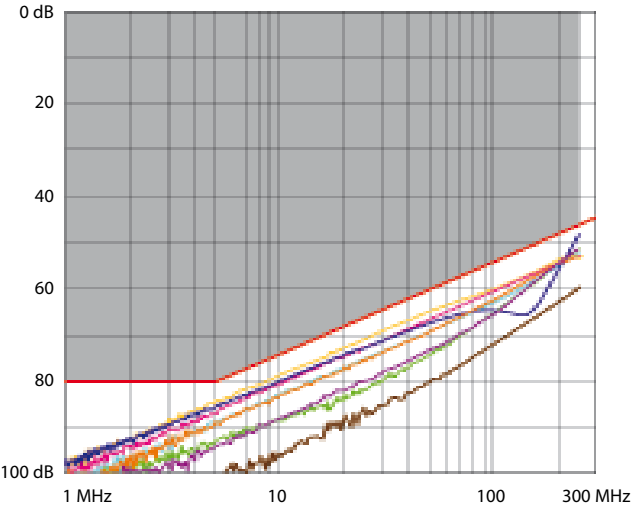


9. PERFORMANCE AT 20°C (Cont.)


■ 9.1 Component performance (RJ 45 connectors) (cont.)
FEXT (Far end Crosstalk Attenuation)

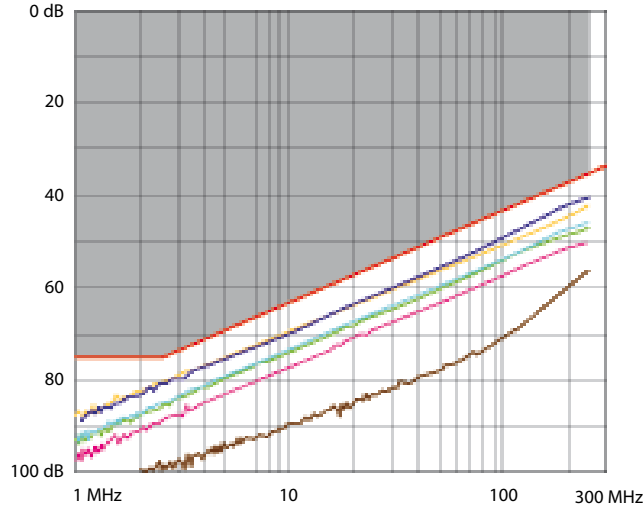

■ 9.2 Performance of permanent link with F/UTP cable
Return loss

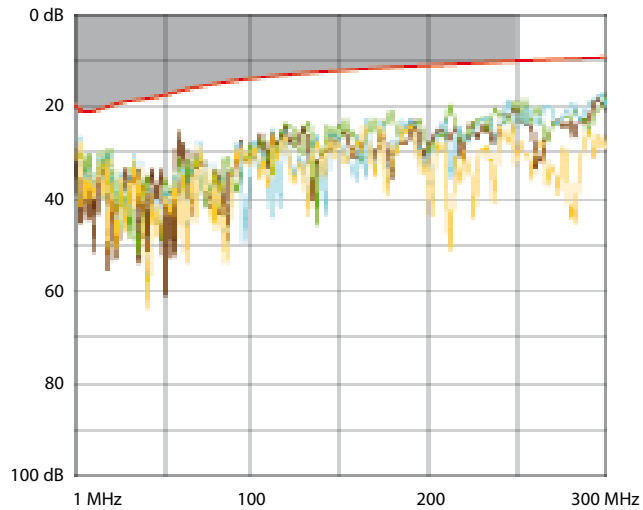


Attenuation

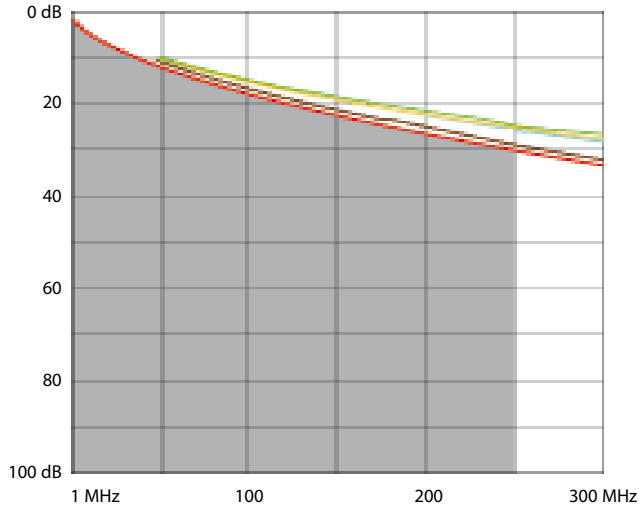


9. PERFORMANCE AT 20°C (Cont.)


■ 9.2 Performance of permanent link with F/UTP cable (Cont.)
NEXT (Near end Crosstalk Attenuation)

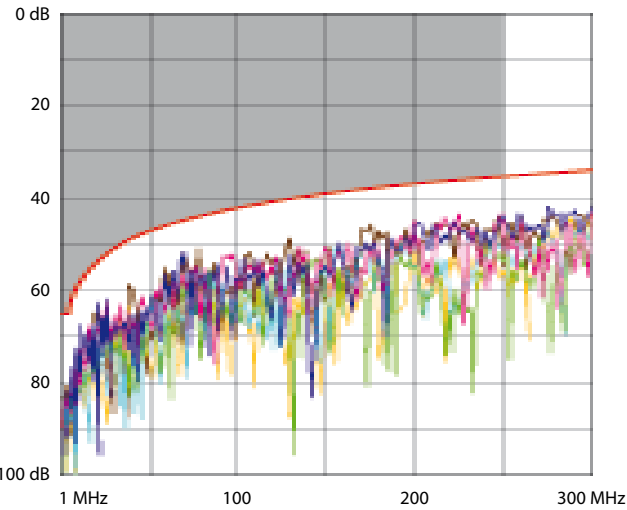

PS NEXT (Power Sum NEXT)

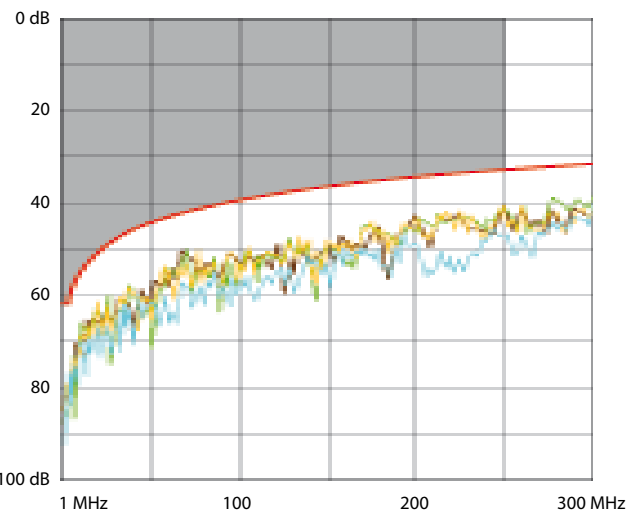


ACR (Attenuation to Crosstalk Ratio)

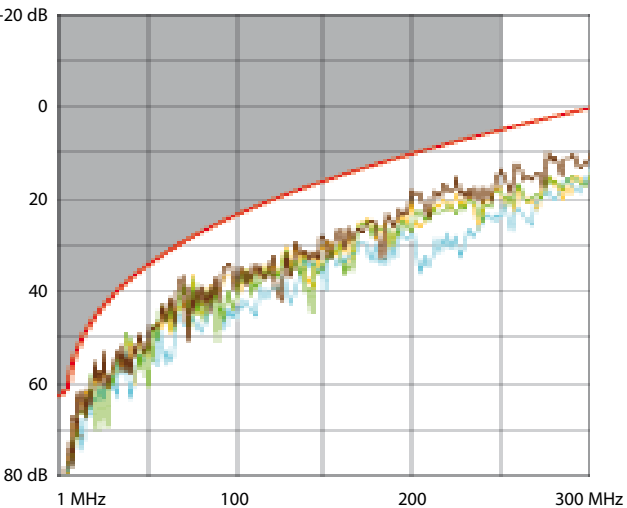


9. PERFORMANCE AT 20°C (Cont.)

■ 9.2 Performance of permanent link with F/UTP cable (Cont.)
ELFEXT (Equal Level End Crosstalk Attenuation)

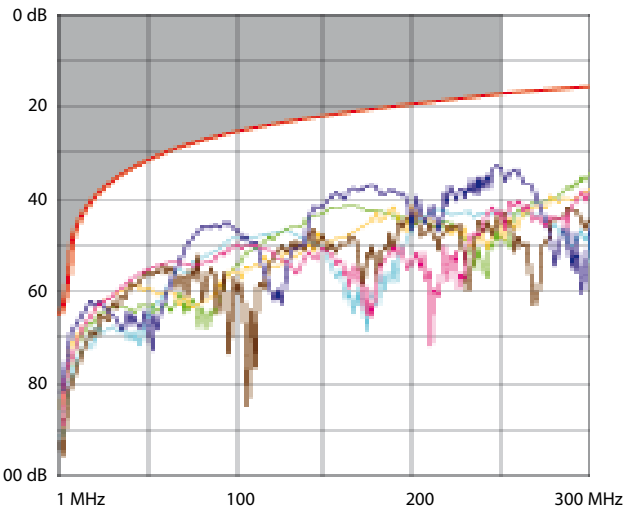

Delay skew

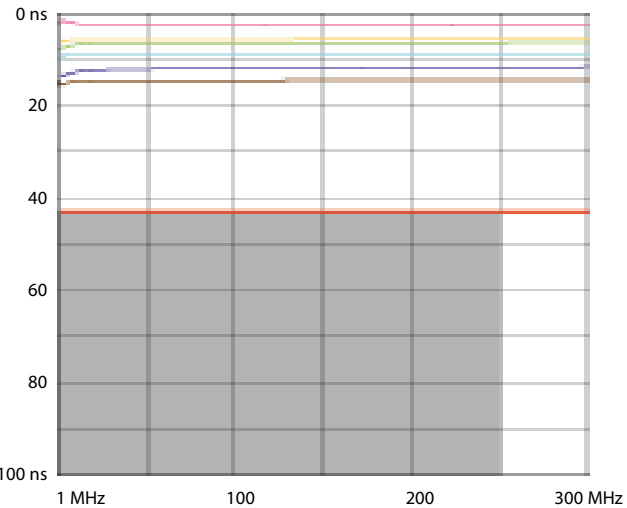

* Contains a silver compound to ontagonize the growth of bacteria on the surface.