

Concord

OPTIX LINEAR SURFACE 1200 4000K ALU DALI EM 2023801



Features

- OPTIX LINEAR SURFACE 1200 4000K ALU DALI EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Surface and suspended mounting. Size: 1160x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 29W. Luminaire efficacy 117lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Product Overview


| | |
|---------------------------------|---|
| Product name | OPTIX LINEAR SURFACE 1200 4000K ALU DALI EM |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting |
| Fixture rating | Enclosed |
| Fixture luminous flux (lm) | 3400 |
| Luminaire efficacy (lm/W) | 117 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |

Concord

OPTIX LINEAR SURFACE 1200 4000K ALU DALI EM 2023801

| | |
|--------------------------------|----------------------------------|
| Luminous flux (emergency) (lm) | 85 |
| Total power consumption (W) | 29 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5025768238019 |
| Warranty | 5 years |

Photometry

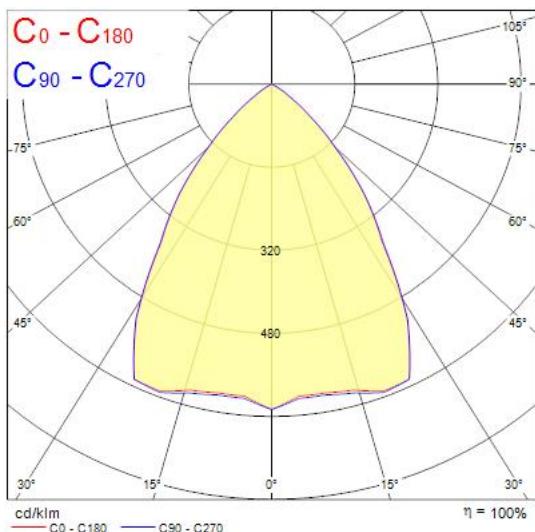

Technical drawings

