

Product data sheet Spirotech

Product name

SpiroTrap -22mm -Hor

Product properties

A brass dirt separator with a 22 mm - 2" horizontal connection

- Very small particles, from 5 μm (= 0.005 mm) are separated and removed
- Dirt can be drained while the system is in operation
- No shut-off valves or bypass required
- Constant low pressure drop
- Maintenance only takes a few seconds and is not a dirty job compared to a filter solution
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- No unnecessary downtime
- Horizontal connections
- Connection diameters from 22 mm to 2" (G2)


Article number

AE022

Product image



Product dimensions

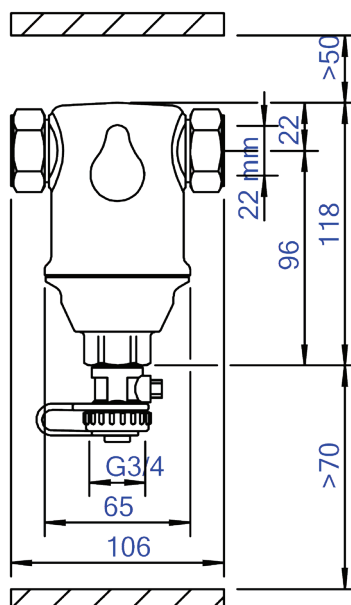

Product data sheet Spirotech

ETIM product data

Housing material	Brass	Suitable for closed system	Yes
With drain valve	Yes	Suitable for solar	No
Housing material quality	Other	Whirl operating principle	No
Backwash filter	No	Negative pressure operating principle	No
Max. operating pressure	10 bar	With dismountable filter	No
Variable flow direction	Yes	Filter volume	0.18 l
With insulation	No	Magnet operating principle	No
Separator type	Dirt	Thrust operating principle	No
Connection	Compression ring	With automatic de-aerator	No
Model	Horizontal	Partial flow principle	No
Nominal diameter	Other	Principle full flow with settling	Yes
Max. glycol mixture	50 %	With integrated replenishment automat	No
Suitable for heating	Yes	With couplers	Yes
Suitable for cooling	Yes	Cleaning possible during operation	Yes
Outer pipe diameter	22 mm	Material of connection	Brass
Construction length	106 mm	Inlet/outlet offset distance	0 mm
Article compression class	PN 10	Material quality connection	Other
Surface protection	Untreated	Operating principle	Other
Suitable for open system	No		

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

