

Features

- Direct retrofit replacement for high-pressure mercury vapor lamps (HPMV) 50,000 hours average rated lifetime Up to 71% energy saving compared to the standard high-pressure mercury vapor lamps Detachable 3.5mm jack plug microwave sensor allow to adjust hold-time and standby brightness level Mercury-free solution Lower maintenance cost High lumen efficacy Dual operating mode – compatible with HPMV magnetic ballast and also, suitable for AC direct mains 220-240V operation Up and down light distribution High surge voltage protection: 4kV Suitable for both open and enclosed luminaires Wide light distribution High switching cycles – 200,000X High colour rendering – CRI80 Minimum and maximum operating temperature: -30°C to 50°C

Product Overview

| | |
|-----------------------------------|--|
| Product name | ToLEDo Performer H230 15500LM 840 E40 SL |
| Technology | LED |
| Watt (Rated) (W) | 115 |
| Cap/Base | E40 |
| Fixture rating | Open |
| General application | Logistics & Industry |
| ETIM Class | EC001959 |
| Luminous flux (lm) | 15500 |
| Correlated colour temperature (k) | 4000 |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Photobiological Risk Group | RG1 |
| Wattage (W) | 115 |
| Power consumption (W) | 115 |
| Average life (Nominal) (h) | 50000 |
| Product EAN number | 5410288283784 |

ToLEDo Performer H230 15500LM 840 E40 SL 0028378


Warranty

5 years

Useful luminous flux (#use)

15500

Photometry

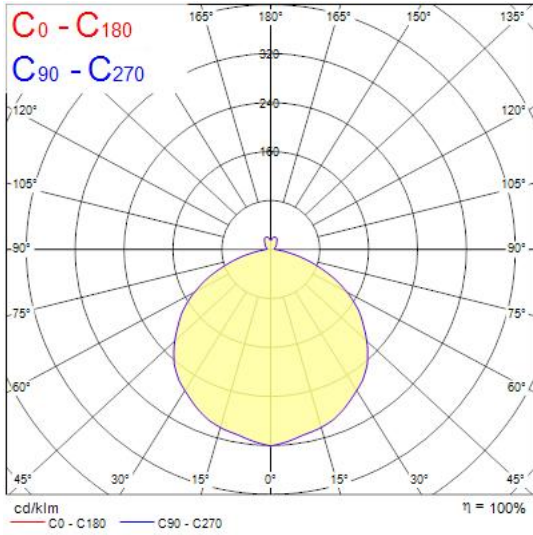

Technical drawings

