

Resisto 1200 HE IP66 DALI 2800lm 840
0010236



Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 18W; 156lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark.


Product Overview

Product name	Resisto 1200 HE IP66 DALI 2800lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
E-number FI	4357135
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	156
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey

Resisto 1200 HE IP66 DALI 2800lm 840
0010236

IP rating	IP66
IK rating	IK08
Product EAN number	5410288102368
Warranty	5 years

Photometry

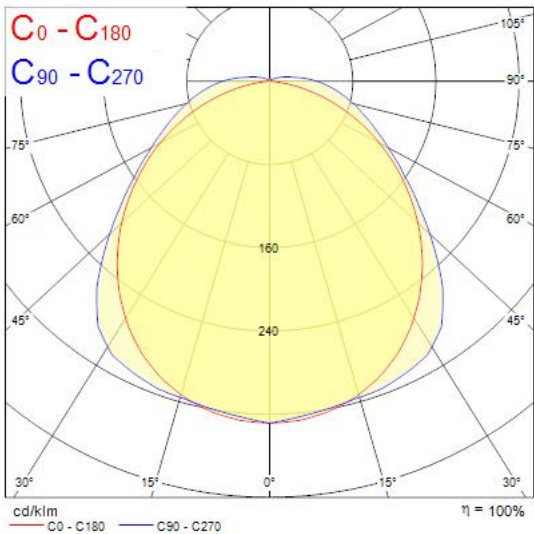

Technical drawings

