

Product data

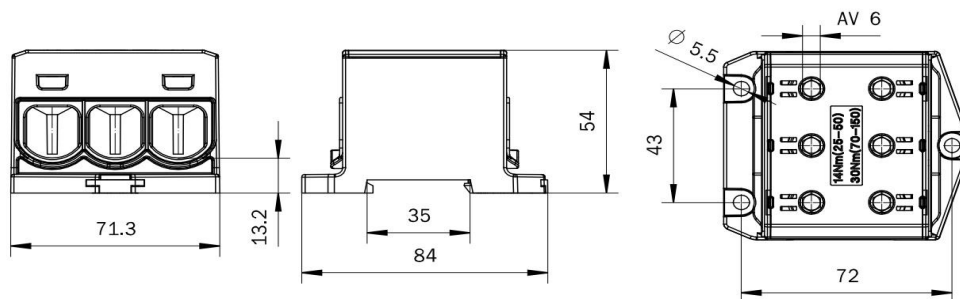
| | | | | | |
|--------------|---|----------|----------------|------------|----------------------|
| Product code | VC05-0240 | STK-code | 1912365 | EAN-code | 6410019123654 |
| Product name | OTL-connector 3xAl/Cu 25-150mm ² (Blue) | | | ETIM class | EC000897 |
| Wires | 3xCu 25-150 mm ² / 3xAl 25-120 mm ² | | | | |

Technical data

| | | | |
|-------------------------------|---|--------------|----|
| Nominal current (IEC) | Cu | 640 | A |
| | Al | 500 | A |
| Nominal voltage (IEC) | 1000 V AC / 1500 V DC | | |
| Max. Current (US) | Cu | 2x285 | A |
| | Al | 250 | A |
| Max. Voltage (US) | 1000 V | | |
| Number of poles | 1 pcs | | |
| Max. Cross section | 150 mm ² | | |
| Tightening torque | - | | |
| | 25-50 mm ² (1/0-2 AWG) | 14 | Nm |
| | 70-150 mm ² (350 kcmil-2/0 AWG) | 35 | Nm |
| Min. installation temperature | +5 °C | | |
| Operating temperature | -25...+80 °C | | |
| Weight | 246 g | | |
| IP-protection | IP20 | | |
| Standards | EN 61238-1:2003; EN60947-7-1:2009; UL1059 & CSA C22.2 No. 158-10 | | |
| Color / Material | Blue RAL 5015/ PA66-V0 | | |
| Mounting / Connection | DIN-rail and screw (M5) mounting | | |


Description

OTL-connectors are designed for connecting and branching aluminium and copper conductors. The body is made of tin plated aluminium. Housing is made of UL94 V0 class polyamide. Made in Finland.

Drawing

Package

| | | | | | |
|-------------|------------|---------------|------------|-------------|-------------|
| Package | Box | Pcs / Package | 12 | Weight [kg] | 3,10 |
| Length [mm] | 225 | Width [mm] | 190 | Height [mm] | 145 |

Ouneva Oy

Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi