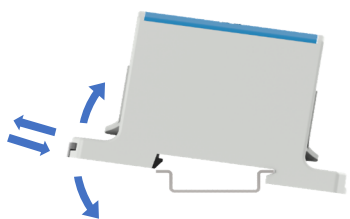

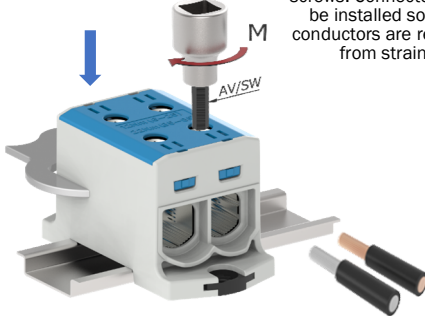


Product data							
Product code	Product name	I_n Al	I_n Cu	U_n	US specific		
					I_{max} Al	I_{max} Cu	U_{max}
VC05-0042	OTL-connector 2xAl/Cu 6-95mm ² (Grey)	220 A	490 A	1000 V AC / 1500 V DC	180 A	2x230 A	1000 V
VC05-0043	OTL-connector 2xAl/Cu 6-95mm ² (Blue)	220 A	490 A	1000 V AC / 1500 V DC	180 A	2x230 A	1000 V
VC05-0044	OTL-connector 2xAl/Cu 6-95mm ² (Yellow/Green)	220 A	490 A	1000 V AC / 1500 V DC	180 A	2x230 A	1000 V
VC05-0148	OTL-connector 2xAl/Cu 6-95mm ² (Red)	220 A	490 A	1000 V AC / 1500 V DC	180 A	2x230 A	1000 V
VC05-0149	OTL-connector 2xAl/Cu 6-95mm ² (Black)	220 A	490 A	1000 V AC / 1500 V DC	180 A	2x230 A	1000 V

Installation	
Certification and approval	DIN-rail and screw (M5) mounting
 	DIN-rail mounting Set the connector on DIN-rail. Push until connector locks down.  Removing from DIN-rail Release the plastic snap with a screwdriver. Lift the connector.   Use max. Ø5 mm screw.

Connection					
Screw 	Screw	M14	Tightening torque M	6-25 mm² (3-10 AWG) 12 Nm	Stripping length L 
	SW	6	35-95 mm² (4/0-2 AWG) 22 Nm		
			Conductor range	2xAl/Cu 6-95 mm²	
Copper conductors Max. 3 X CU / Conductor contact space  ≤ 95 mm² total	Aluminium conductors 1 X AL / Conductor contact space  Anti-corrosion paste: e.g. Penetrox	Supported IEC 60228 -conductors  Class 5 & 6 (fine stranded) Using ferrule is recommended Class 1 & 2 (solid and stranded)		Sector shaped cable  Pre-round the cable	

Conductor installation	Marking	Attention!
 Support connector during tightening the screws. Connector must be installed so that conductors are relieved from strain.	 5 mm width (Eg. Partex TX)	 Each protective or neutral conductor must have their own conductor space. SFS 6000:2007 clause 810.7

Cross section and max. number of Cu- conductors / contact space (Al- conductors in parenthesis)										
1,5 mm ²	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²	The specified max. amount of conductors refers only to industrially installed terminals.		
-	-	3 (1)	3 (1)	3 (1)	3 (1)	2 (1)	1 (1)			
			70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²	400 mm ²
			1 (1)	1 (1)	-	-	-	-	-	-

OUNEVA Oy

Teollisuustie 21
FI-82730 Tuupovaara, Finland

Tel. +358 400 179 750
info@ouneva.fi

www.ounevagroup.fi
www.ounevaproducts.fi