

79515200	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-A 32 SD-BO	

Description

- The large, robust housing for two inserts of size 16.



General Characteristics

Series	H-A 32
Version	Surface-mount base with cover
Locking	Bolts for double lever
Protection cover	yes
Cable entry	Side, see table
Gland body	See table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials / Surfaces

Housing	Aluminium alloy, powder-coated, grey
Sealing	NBR

Standard

Safety Standard	IEC 61984
-----------------	-----------

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
79515200	EPIC H-A 32 SDR-BO M25	M25	-
79515400	EPIC H-A 32 SDR-BO M32	M32	-
79516200	EPIC H-A 32 SDRL-BO M25	M25	M25
79516400	EPIC H-A 32 SDRL-BO M32	M32	M32

Creator: THB01/PDP Released: TODV1/PDP	Document: DB79515200EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

79515200	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-A 32 SD-BO	

Technical Drawings

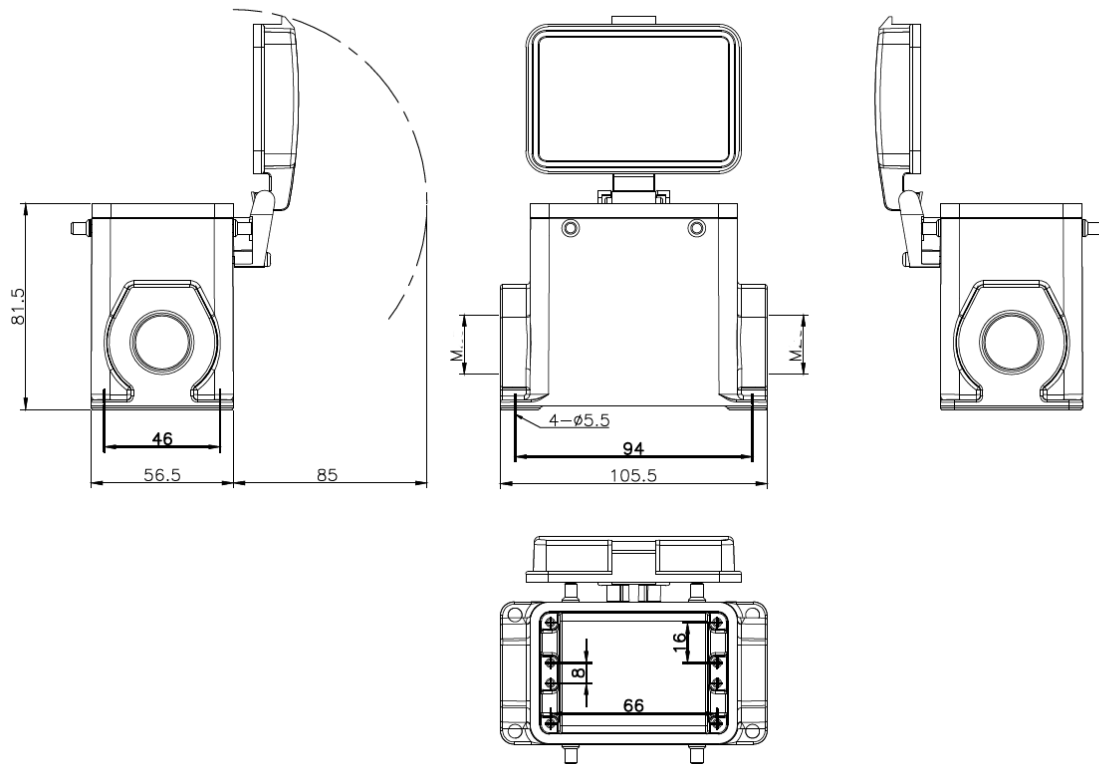

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Machine and equipment manufacturing, Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB79515200EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------